


ROHRflex PA 12

ROHRflex corrugated plastic tubings


Protective all-plastic tubing, internally and externally corrugated, fine or coarse profile, for very flexible applications, outdoor area, V2 (UL 94), EN 45545-2 only in black

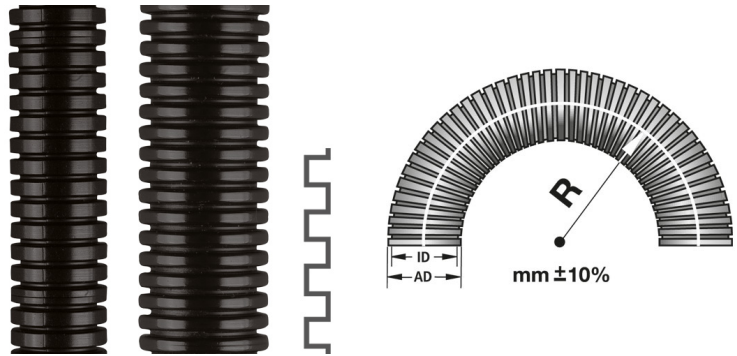

Temperature: -50°C ... +100°C ^ +130°C

Material: PA 12 plastics

Protection class [acc. to EN 60529]: IP 69K



FLEXA No.	Colour	OD [mm]	Profile	DI [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
0236.202.006	Black	10,0	fine	6,5	10,0	13	35	0,020	50
0236.202.010	Black	13,0	fine	10,0	13,0	15	45	0,030	50
0236.202.012	Black	15,8	fine	12,5	15,8	22	55	0,040	50
0236.202.014	Black	18,5	fine	14,3	18,2	27	65	0,050	50
0236.202.016	Black	21,2	fine	16,5	21,2	35	75	0,060	50
0236.202.023	Black	28,5	fine	23,0	28,5	45	100	0,100	50
0236.202.029	Black	34,5	fine	29,0	34,5	50	120	0,120	25
0236.202.036	Black	42,5	fine	36,0	42,5	80	150	0,150	25
0236.202.048	Black	54,5	fine	48,0	54,5	100	190	0,210	25
0236.232.016	Black	21,2	coarse	15,5	21,2	45	75	0,060	50
0236.232.023	Black	28,5	coarse	22,0	28,5	55	100	0,100	50
0236.232.029	Black	34,5	coarse	28,0	34,5	65	120	0,120	25
0236.232.036	Black	42,5	coarse	35,8	42,2	90	150	0,140	25
0236.232.048	Black	54,5	coarse	47,5	54,5	100	190	0,210	25
0236.201.006	Grey	10,0	fine	6,5	10,0	13	35	0,020	50
0236.201.010	Grey	13,0	fine	10,0	13,0	15	45	0,030	50
0236.201.012	Grey	15,8	fine	12,5	15,8	22	55	0,040	50
0236.201.014	Grey	18,5	fine	14,3	18,2	27	65	0,050	50
0236.201.016	Grey	21,2	fine	16,5	21,2	35	75	0,060	50
0236.201.023	Grey	28,5	fine	23,0	28,5	45	100	0,100	50
0236.201.029	Grey	34,5	fine	29,0	34,5	50	120	0,120	25
0236.201.036	Grey	42,5	fine	36,0	42,5	80	150	0,150	25
0236.201.048	Grey	54,5	fine	48,0	54,5	100	190	0,210	25
0236.209.006	Orange	10,0	fine	6,5	10,0	13	35	0,020	50
0236.209.010	Orange	13,0	fine	10,0	13,0	15	45	0,030	50
0236.209.012	Orange	15,8	fine	12,0	15,8	22	55	0,040	50



FLEXA No.	Colour	OD [mm]	Profile	DI [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
0236.209.016	Orange	21,2	fine	16,5	21,2	35	75	0,060	50
0236.209.023	Orange	28,5	fine	23,0	28,5	45	100	0,100	50
0236.209.029	Orange	34,5	fine	29,0	34,5	50	120	0,120	25
0236.209.036	Orange	42,5	fine	36,0	42,5	80	150	0,150	25
0236.209.048	Orange	54,5	fine	48,0	54,5	100	190	0,210	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.