MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE **Electric** (THREE PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 17...23A

ENERGY AND AUTOMATION



Product designation			RF38
Product type designation			Motor protection relay
General characteristics			
Number of poles		nr.	3
Overvoltage category			III
Pollution degree			3
Frontal IP degree			IP20
Type of release			Thermal
Protection fuse			
	gG (IEC)	Α	50
	aM (IEC)	Α	25
	RK5 (UL)	Α	90
Phase failure detection			Yes
Reset mode			Manual or
			automatic
Power circuit characteristics			
Rated insulation voltage Ui IEC/EN		V	690
Rated impulse withstand voltage Uimp		kV	6
Rated operational voltage		V	690
Operational frequency			
	min	Hz	0
	max	Hz	400
Operational current le			
	Operational current min	Α	17
	Operational current max	Α	23
Tripping class			10A
Test Button			Yes
Trip indicator			Yes
Terminals			
	type		Screw and
	турс		washer
	screw		M4
	width	mm	12.6
	tool		Phillips 2
Tightening torque for terminals			
	min	Nm	2
	max	Nm	2.5
	min	Ibin	1.5
	max	Ibin	1.8
Conductor section			
	AWG/kcmil max		8
Auxiliary circuit characteristics			
Auxiliary contacts			
	NO	nr.	1




MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE **electric** (THREE PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 **ENERGY AND AUTOMATION** CONTACTORS, 17...23A

	NC	nr.	1
Auxiliary Rated insulation voltage Ui IEC/EN	110	V	690
Auxiliary Rated impulse withstand voltage Uimp		kV	6
Auxiliary Rated operational voltage		V	690
Operating current AC15			
	24V	Α	3
	120V	Α	3
	240V	Α	1.5
	380V	Α	0.95
	480V	Α	0.75
	500V	Α	0.72
	600V	Α	0.6
Operating current DC13			
	125V	Α	0.11
	600V	A	0.22
IEC Conventional free air thermal current Ith		A	10
Terminals			
	Auxiliary circuit type		Screw and
	•		washer
	Auxiliary circuit screw		M3,5
	Auxiliary circuit width	mm	8 Dhilling 2
Conductor section	Auxiliary circuit tool		Phillips 2
Conductor Section	Auxiliary circuit Flexible w/o lug max	mm²	2.5
	Auxiliary circuit Flexible w/o lug max Auxiliary circuit Flexible c/w lug max	mm²	2.5
Tightening torque for terminals	Advillary circuit i lexible 6/W lug max	111111	2.5
rightening torque for terminals	Auxiliary circuit min	Nm	0.8
	Auxiliary circuit max	Nm	1
	Auxiliary circuit max Auxiliary circuit min	Ibin	0.59
	Auxiliary circuit max	Ibin	0.74
UL/CSA and IEC/EN 60947-5-1 designation	, taranany en can mark		B600-R300
Ambient conditions			
Operating temperature			
	min	°C	-25
	max	°C	60
Storage temperature			
	min	°C	-50
	max	°C	70
Compensation temperature			
	min	°C	-20
	max	°C	60
Max altitude		m	3000
Mechanical features			
Operating position			
	normal		Vertical plan
	allowable		±30°
Weight UL technical data		g	160
Full-load current (FLA) for three-phase AC motor			
	at 480V	Α	23
	at 600V	Α	23
Dimensions			


MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE electric (THREE PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 17...23A

ENERGY AND AUTOMATION


BF00 A... BF09 A... - BF12 A... - BF18 A... - BF25 A... three poles with RF...38 thermal overload relay



- BF32 00A... - BF38 00A... three poles with RF...38 thermal overload relay



Wiring diagrams

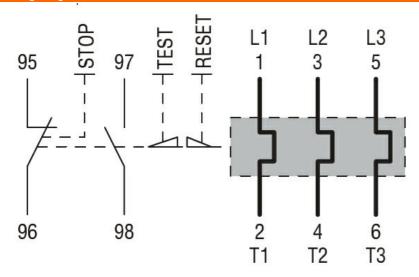

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-4-1



RF382300

LOVALO	MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE
electric	(THREE PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38
ENERGY AND AUTOMATION	

	UL508
Certifications	
	CCC
	cULus
	EAC

ETIM classification

ETIM 8.0

EC000106 -Thermal overload relay