**ENERGY AND AUTOMATION** 

MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE electric (THREE PHASE), MANUAL RESETTING. DIRECT MOUNTING ON BF40 - BF94 CONTACTORS, 35...50A



Product designation			RF82
Product type designation			Motor protection
			relay
General characteristics			2
Number of poles		nr.	3
Overvoltage category			III
Pollution degree			3
Frontal IP degree			IP20
Type of release			Thermal
Protection fuse	0 (150)		
	gG (IEC)	Α	100
	aM (IEC)	Α	50
	K5 (UL)	Α	175
Phase failure detection			Yes
Reset mode			Manual
Power circuit characteristics			
Rated insulation voltage Ui IEC/EN		V	690
Rated impulse withstand voltage Uimp		kV	8
Rated operational voltage		V	690
Operational frequency			
	min	Hz	0
	max	Hz	400
Operational current le			
	Operational current min	Α	35
	Operational current max	Α	50
Tripping class			10A
Test Button			Yes
Trip indicator			Yes
Terminals			
	type		Yoke clamp
	screw		M5
	width	mm	9
	tool		Phillips 2
Tightening torque for terminals			·
	min	Nm	3.9
	max	Nm	3.9
	min	lbin	2.88
	max	lbin	2.88
Conductor section			
	AWG/kcmil max		2
Auxiliary circuit characteristics			
Auxiliary contacts			
,	NO	nr.	1
	NC	nr.	1
Auxiliary Rated insulation voltage Ui IEC/EN	110	V	690
		•	




MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE (THREE PHASE), MANUAL RESETTING. DIRECT MOUNTING ON BF40 - BF94 CONTACTORS, and Automation 35...50A


Auxiliary Rated impulse withstand voltage Uimp		kV	6
uxiliary Rated operational voltage		V	690
Operating current AC15			
	24V	Α	3
	120V	Α	3
	240V	Α	1.5
	380V	Α	0.95
	480V	Α	0.75
	500V	Α	0.72
	600V	Α	0.6
Operating current DC13			
, , , , , , , , , , , , , , , , , , ,	125V	Α	0.11
	600V	Α	0.22
EC Conventional free air thermal current Ith	3331	A	10
reminals		, , ,	10
Citimalo			Screw and
	Auxiliary circuit type		washer
	Auxiliary circuit screw		M3,5
	Auxiliary circuit screw  Auxiliary circuit width	mm	8
	Auxiliary circuit width  Auxiliary circuit tool	111111	o Phillips 1
Conductor section	Auxiliary Circuit (001		Lumba I
Conductor Section	Auxiliant aires it Florible and the area	no no ?	2.5
	Auxiliary circuit Flexible w/o lug max	mm²	2.5
	Auxiliary circut Flexible c/w lug max	mm²	2.5
ightening torque for terminals			
	Auxiliary circuit min	Nm	1
	Auxiliary circuit max	Nm	1
	Auxiliary circuit min	lbin	0.74
	Auxiliary circuit max	lbin	0.74
JL/CSA and IEC/EN 60947-5-1 designation			B600-P600
Ambient conditions			
Operating temperature			
	min	°C	-20
	max	°C	55
Storage temperature			
•	min	°C	-55
	max	°C	80
Compensation temperature	. Tiox		
	min	°C	-15
	max	°C	55
Max altitude	illax		3000
Mechanical features		111	3000
Operating position			\/t':1!
	normal		Vertical plan
W. L. L.	allowable		±30°
Veight		g	365
JL technical data			
JL technical data Full-load current (FLA) for three-phase AC motor			
	at 480V	Α	50

**ENERGY AND AUTOMATION** 

MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE electric (THREE PHASE), MANUAL RESETTING. DIRECT MOUNTING ON BF40 - BF94 CONTACTORS, 35...50A

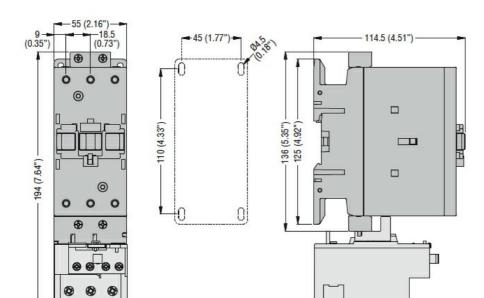

## Wiring diagrams

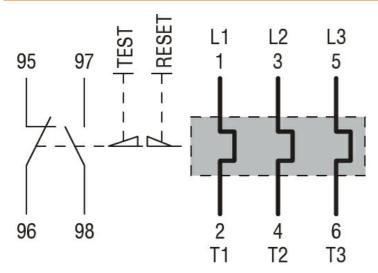

## Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-4-1

**UL508** 

Certifications

cULus

ETIM classification

**ETIM 8.0** 

EC000106 -Thermal overload

relay