




RQT-PA

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector quick-type, T distributor for rational tubing assembly by just putting on, high density

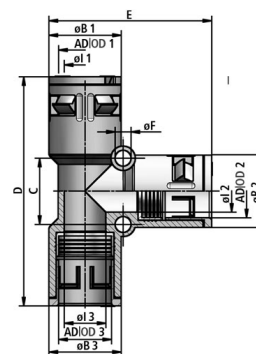

Temperature: -40°C ... +120°C

Material: PA plastics

Protection class [acc. to EN 60529] IP 68 | IP 69K



FLEXA No.	Colour	OD [mm]	Ø B2 [mm]	Ø B1/3 [mm]	E [mm]	D [mm]	Ø F [mm]	C [mm]	Weight [kg/100]	PU [pcs.]
5020.041.208	Black	OD1/OD3 - 15,8 / OD2 - 15,8	23,0	23,0	54,5	80,0	5,5	20,0	2,200	10
5020.041.201	Black	OD1/OD3 - 21,2 / OD2 - 21,2	29,5	29,5	66,0	93,5	6,5	27,0	4,100	10
5020.041.202	Black	OD1/OD3 - 28,5 / OD2 - 28,5	37,0	37,0	78,0	107,0	6,5	34,0	5,900	10
5020.041.210	Black	OD1/OD3 - 28,5 / OD2 - 34,5	44,0	37,0	77,0	113,0	6,5	38,0	6,900	10
5020.041.211	Black	OD1/OD3 - 34,5 / OD2 - 34,5	44,0	44,0	90,5	119,0	6,5	40,0	8,100	10
5020.041.212	Black	OD1/OD3 - 42,5 / OD2 - 42,5	52,0	52,0	94,5	138,0	6,5	45,0	11,700	10
5020.041.213	Black	OD1/OD3 - 54,5 / OD2 - 54,5	64,0	64,0	105,0	146,0	6,5	56,5	15,800	5
5020.041.008	Grey	OD1/OD3 - 15,8 / OD2 - 15,8	23,0	23,0	54,5	80,0	5,5	20,0	2,200	10
5020.041.001	Grey	OD1/OD3 - 21,2 / OD2 - 21,2	29,5	29,5	66,0	93,5	6,5	27,0	4,100	10
5020.041.002	Grey	OD1/OD3 - 28,5 / OD2 - 28,5	37,0	37,0	78,0	107,0	6,5	34,0	5,900	10
5020.041.010	Grey	OD1/OD3 - 28,5 / OD2 - 34,5	44,0	37,0	77,0	113,0	6,5	38,0	6,900	10
5020.041.011	Grey	OD1/OD3 - 34,5 / OD2 - 34,5	44,0	44,0	90,5	119,0	6,5	40,0	8,100	10
5020.041.012	Grey	OD1/OD3 - 42,5 / OD2 - 42,5	52,0	52,0	94,5	138,0	6,5	45,0	11,700	10
5020.041.013	Grey	OD1/OD3 - 54,5 / OD2 - 54,5	64,0	64,0	105,0	146,0	6,5	56,5	15,800	5

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.