




RQG-M | metric thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, straight, metric outer thread, integrated snap-in sleeve with sealing, high density

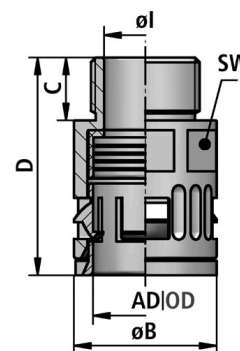

Temperature: -40°C ... +120°C

Material: PA plastics

Protection class [acc. to EN 60529] IP 68 | IP 69K



FLEXA No.	OD [mm]	Colour	Threadtype	ø I [mm]	ø B [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
5020.037.210	10,0	Black	M 10 x 1,0	6,0	17,0	11,5	34,5	16	0,400	50
5020.065.203	10,0	Black	M12 x 1,5	7,0	17,0	11,5	34,5	16	0,400	50
5020.037.212	13,0	Black	M12 x 1,5	7,0	20,0	12,0	37,0	18	0,520	50
5020.065.205	13,0	Black	M16 x 1,5	10,0	20,0	11,5	37,0	18	0,540	50
5020.037.216	15,8	Black	M16 x 1,5	11,0	23,0	11,5	39,0	21	0,700	50
5020.065.207	15,8	Black	M20 x 1,5	12,0	25,0	13,0	39,0	21	0,760	50
5020.037.218	18,5	Black	M20 x 1,5	16,0	26,0	13,0	43,0	24	0,800	50
5020.037.220	21,2	Black	M20 x 1,5	16,0	29,5	13,0	44,5	27	1,120	50
5020.065.209	21,2	Black	M25 x 1,5	17,0	29,5	13,0	44,5	27	1,240	50
5020.037.225	28,5	Black	M25 x 1,5	19,5	37,0	13,0	47,0	34	1,680	25
5020.065.211	28,5	Black	M32 x 1,5	23,5	37,0	15,0	49,0	34	1,800	25
5020.037.232	34,5	Black	M32 x 1,5	25,5	44,0	15,0	51,0	40	2,400	25
5020.037.238	34,5	Black	M40 x 1,5	30,5	48,5	15,0	51,5	40	2,560	25
5020.037.240	42,5	Black	M40 x 1,5	32,0	58,0	17,0	76,0	55	5,800	25
5020.037.245	42,5	Black	M50 x 1,5	37,5	63,0	17,0	76,0	60	6,720	25
5020.037.250	54,5	Black	M50 x 1,5	42,5	68,0	17,0	88,0	65	8,300	10
5020.037.263	54,5	Black	M63 x 1,5	49,0	74,0	17,0	88,0	70	10,150	10
5020.037.010	10,0	Grey	M 10 x 1,0	6,0	17,0	11,5	34,5	16	0,400	50
5020.065.003	10,0	Grey	M12 x 1,5	7,0	17,0	11,5	34,5	16	0,400	50
5020.037.012	13,0	Grey	M12 x 1,5	7,0	20,0	12,0	37,0	18	0,520	50
5020.037.016	15,8	Grey	M16 x 1,5	11,0	23,0	11,5	39,0	21	0,700	50
5020.065.007	15,8	Grey	M20 x 1,5	12,0	25,0	13,0	39,0	21	0,760	50
5020.037.018	18,5	Grey	M20 x 1,5	16,0	26,0	13,0	43,0	24	0,800	50
5020.037.020	21,2	Grey	M20 x 1,5	16,0	29,5	13,0	44,5	27	1,120	50
5020.065.009	21,2	Grey	M25 x 1,5	17,0	29,5	13,0	44,5	27	1,240	50
5020.037.025	28,5	Grey	M25 x 1,5	19,5	37,0	13,0	47,0	34	1,680	25
5020.065.011	28,5	Grey	M32 x 1,5	23,5	37,0	15,0	49,0	34	1,800	25
5020.037.032	34,5	Grey	M32 x 1,5	25,5	44,0	15,0	51,0	40	2,400	25



FLEXA No.	OD [mm]	Colour	Threadtype	Ø I [mm]	Ø B [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
5020.037.038	34,5	Grey	M40 x 1,5	30,5	48,5	15,0	51,5	40	2,560	25
5020.037.040	42,5	Grey	M40 x 1,5	32,0	58,0	17,0	76,0	55	5,800	25
5020.037.045	42,5	Grey	M50 x 1,5	37,5	63,0	17,0	76,0	60	6,720	25
5020.037.050	54,5	Grey	M50 x 1,5	42,5	68,0	17,0	88,0	65	8,300	10
5020.037.063	54,5	Grey	M63 x 1,5	49,0	74,0	17,0	88,0	70	10,150	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.