

LEAD MARKER 'H'

PRIMARY SIDE

SECONDARY SIDE

0.20

[5] TYP. 4 PLACES

0.46

[12] TYP. 4 PLACES

TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER


CONNECTION TABLE LABEL

INPUT VOLTAGE	OUTPUT VOLTAGE
H4-H3 240	H4-H1 120
H4-H2 230	H4-X1 115
H4-H1 220	H4-X3 110


NOTE: IF BOTH OUTPUTS ARE USED SIMULTANEOUSLY, FUSING SHOULD BE DONE OFF OF THE TRANSFORMER, WITH X3 REPLACING X1

Transformer Specifications

PRIMARY VOLTAGE(S)	208/230/460 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	24/115
RATED V.A.	50
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	4.3 LBS



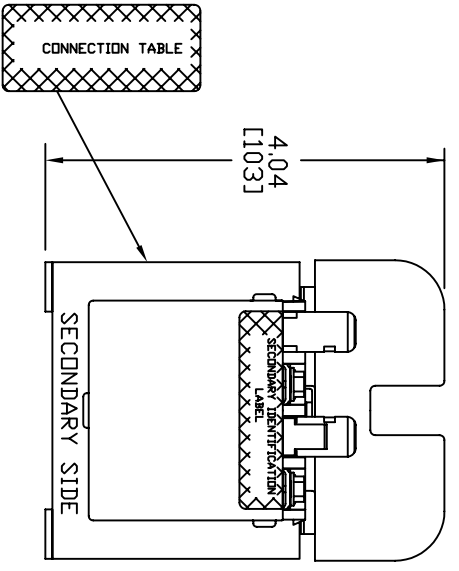


PRIMARY IDENTIFICATION LABEL

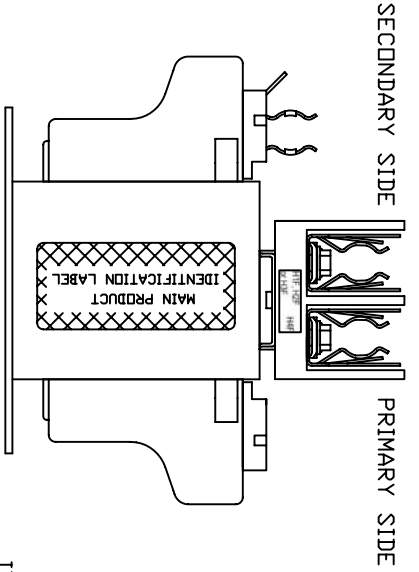

SECONDARY IDENTIFICATION LABEL

MAIN PRODUCT IDENTIFICATION LABEL

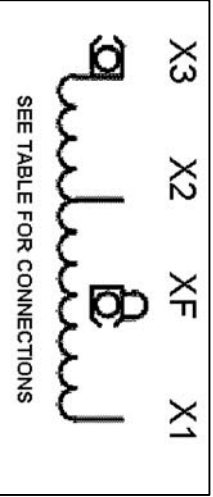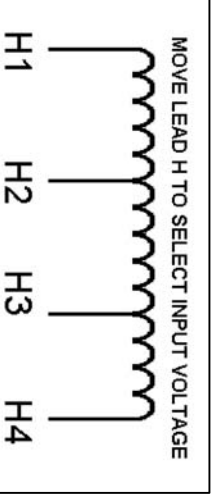

- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
  2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
  3. ALL MEASUREMENTS IN INCHES (MM)

**MICROCON** IMPERVITRAN<sup>®</sup>

50VA 50/60Hz

TEMP CL. 105°C

CAT. NO. B050-2000-8

SERIES 2

08083

PACKAGED ACCESSORIES	
1	-
-	-
MICROCON	
DATE	6/13/07
RELEASE DATE	
DESIGNED BY	JGV
CHECKED BY	
APPROVED BY	
MICROCON INDUSTRIES CORPORATION	
177 CUNCH ROAD, SUITE 100, WESTFIELD, MA 01095	
TEL: 413-253-1500 FAX: 413-253-1505	
WWW.MICROCONTRANSFORMERS.COM	
MODEL NO.	B050-2000-8