



TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

INPUT VOLTAGE	H4-H3	H4-H2	H4-H1	OUTPUT VOLTAGE	XF-X2	XF-X1
240	230	220	25	24	23	
480	460	440	120	115	110	

NOTE: IF BOTH OUTPUTS ARE USED SIMULTANEOUSLY, FUSING SHOULD BE DONE OFF OF THE TRANSFORMER, WITH X3 REPLACING XF




CONNECTION TABLE LABEL

Transformer Specifications	
PRIMARY VOL TAGE(S)	208/230/460 (TRIPLED)
SECONDARY VOL TAGE(S)	24/115
RATED V.A.	75
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL,CUL
ESTIMATED WEIGHT	5.5 LBS

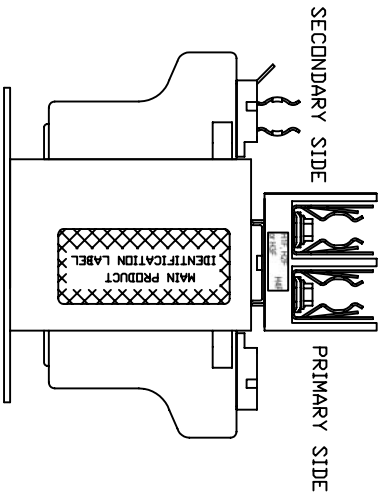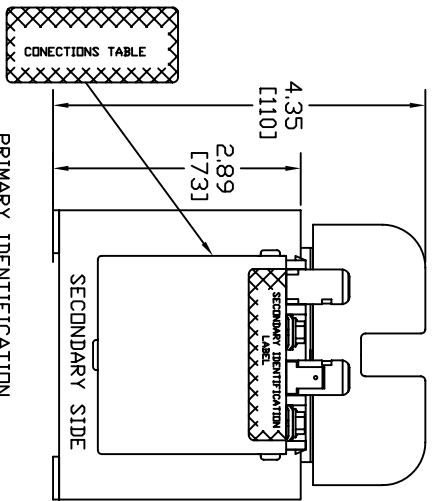

SECONDARY IDENTIFICATION LABEL

MAIN PRODUCT IDENTIFICATION LABEL

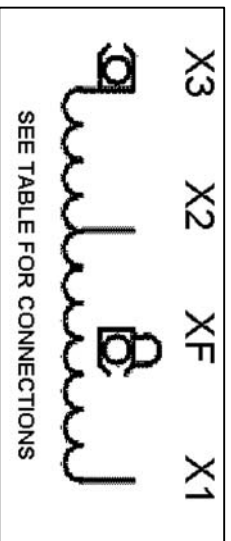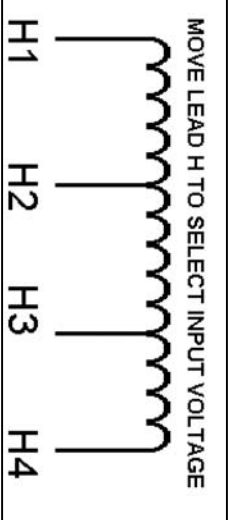

- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 3. ALL MEASUREMENTS IN INCHES (MM)

MICRON **ImperVITRAN**
 75VA 50/60Hz
 U.S. PAT. NO. 35180410
 U.S. PAT. NO. 35180410
 800 664-4660
 www.microntransformers.com

CAT B075-2001-8
 SERIES 2
 TEMP CL 105°C
 Listed 702X 02083

PACKAGED ACCESSORIES	
1	
-	
-	

MICRON INDUSTRIES CORPORATION
 17700 E. WASHINGTON AVE
 DENVER, CO 80231
 PHONE: 303-751-1100
 FAX: 303-751-1101
 www.microntransformers.com

DATE 1/15/08
 DRAWN JLG/V
 CHECKED
 APPROVED

HIDDEN PART NO. B075-2001-8