

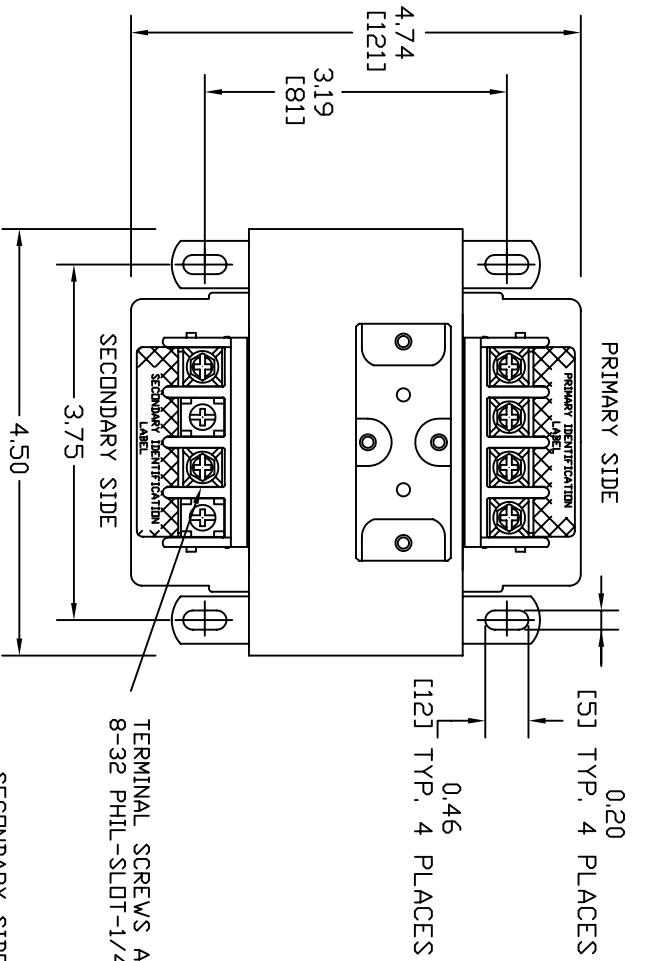


Transformer Specifications	
PRIMARY VOLTAGE(S)	240X480
SECONDARY VOLTAGE(S)	24
RATED V.A.	300
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	11.0 LBS

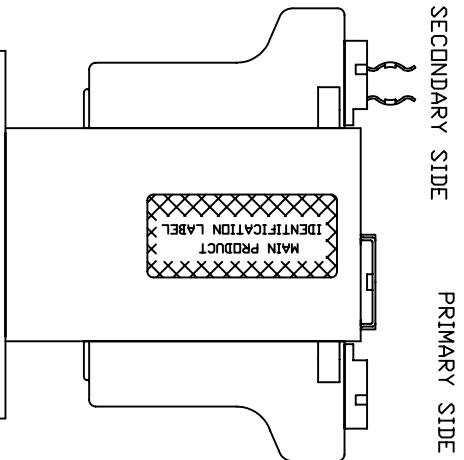

TERMINAL SCREWS ARE COMBINATION
8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

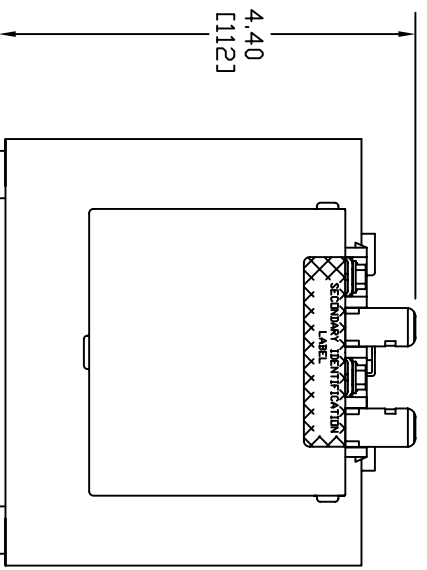


SECONDARY SIDE

SECONDARY SIDE

PRIMARY SIDE

NOTE:

1. TORQUE CONNECTIONS TO 16 LB-IN
2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
2. ALL MEASUREMENTS IN INCHES (MM)

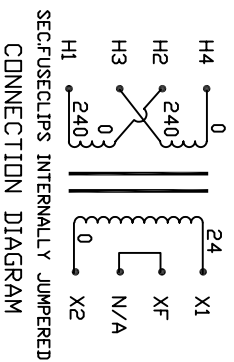


SECONDARY SIDE


PRIMARY SIDE

SEC/FUSECLIPS INTERNALLY JUMPERED
CONNECTION DIAGRAM

MAIN PRODUCT
IDENTIFICATION LABEL

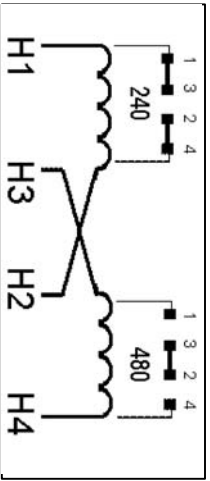

PRIMARY IDENTIFICATION
LABEL

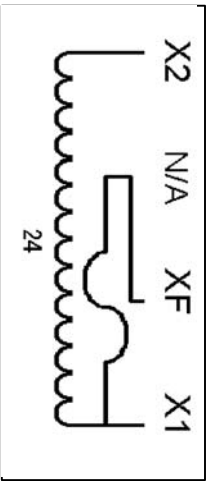

SECONDARY IDENTIFICATION
LABEL

MICRON
TRANSFORMERS
800 664-4660
www.MicronTransformers.com

ImpervITRAN
U.S. PAT. NO. 3576040

CAT. NO. B300PU7JKF
SERIES 2

300VA 50/60Hz
TEMP CL. 130°C

UL Listed 702X
16083

PACKAGED ACCESSORIES	
1	1 PAIR OF JUMPERS
-	-
-	-

DATE: 04/23/08
RELEASE DATE: 04/23/08
MATERIAL: RIN
SPECIES: 300VA
PART NO.: B300PU7JKF

MICRON INDUSTRIES CORPORATION
146 GARDNER STREET, SUITE 200
MILWAUKEE, WI 53215-3888
www.MicronTransformers.com

MICRON PART NO.: B300PU7JKF