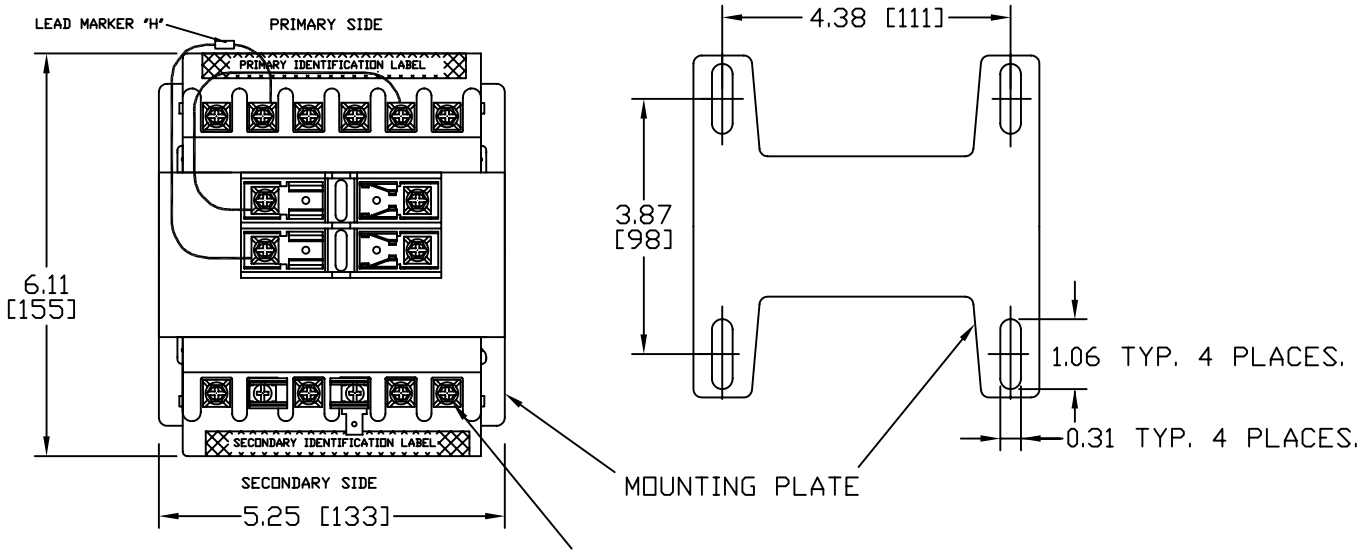

Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460 (TRIPLE)
SECONDARY VOLTAGE(S)	24/115
RATED V.A.	350
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL,CUL
ESTIMATED WEIGHT	16.4 LBS



CONNECTION DIAGRAM

NOTE:
1. ALL MEASURMENTS IN INCHES (MM)

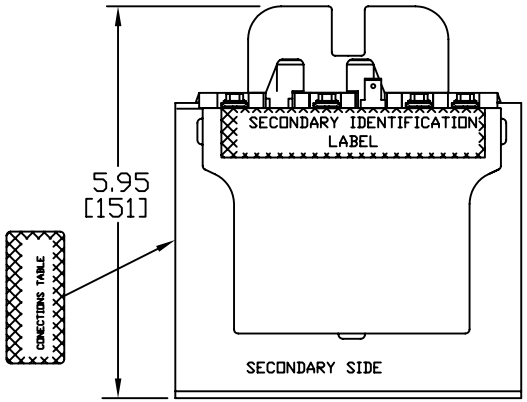

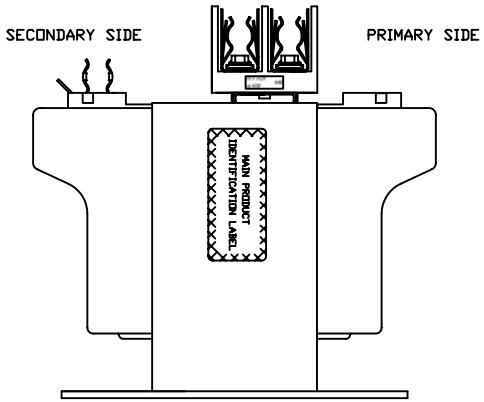

CONNECTION TABLE LABEL

INPUT VOLTAGE			OUTPUT VOLTAGE	
H4-H3	H4-H2	H4-H1	XF-X2	XF-X1
--	240	480	25	120
208	230	460	24	115
200	220	440	23	110

NOTE: IF BOTH OUTPUTS ARE USED SIMULTANEOUSLY, FUSING SHOULD BE DONE OFF OF THE TRANSFORMER, WITH X3 REPLACING XF

MAIN PRODUCT IDENTIFICATION LABEL

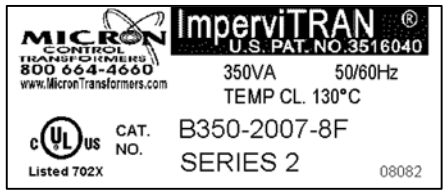

PRIMARY IDENTIFICATION LABEL

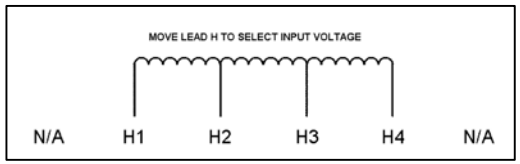

SECONDARY IDENTIFICATION LABEL

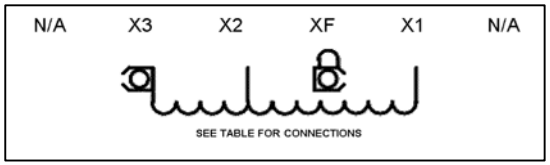

PACKAGED ACCESSORIES	
1	
–	–
–	–

MICRON INDUSTRIES CORPORATION
777 CHURCH ROAD - ELMHURST, IL 60126
Tel. (800)664-4660, (630)516-1222 Fax (630)516-1820
www.MicronTransformers.com

DATE	10/31/07	DRAWN	J.G.V	CHECKED		APPROVED	
RELEASE DATE		CUSTOMER PART NO.					
MICRON PART NO.							
SIZE	C	SCALE	NONE	B350-2007-8F			