

JM Series Mechanical Valve



05


Button Type
05-Selective Knob
06-With Lock Button
06A-Flat Round Button
07-Roller Type

Ordering Code

JM

Specification Code
Stop-type Mechanical Valve

Overall Dimensions

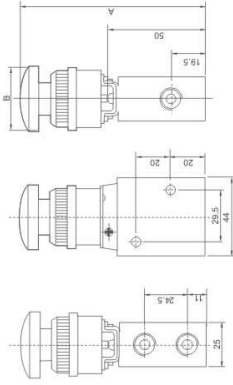

Specification

| Model | JM-05 | JM-06 | JM-06A | JM-07 |
|------------------------|--|-------|--------|-------|
| Working Medium | 40 Micron Filtered Air | | | |
| Position and Way No. | Two-position Three-way, Two-position Two-way | | | |
| Port Size | G1/4" | | | |
| Working-pressure Range | 0~0.8MPa | | | |
| Operating Temperature | 0~60°C | | | |
| Dimension Sheet | A | B | C | D |
| Model | JM-05 | JM-06 | JM-06A | JM-07 |
| A | 114 | 111 | 96 | 84.5 |
| B | 36.5 | 39.5 | 39.5 | 42.5 |

MOV Series Mechanical Valve



01


Button Type
01-Selective Knob
02-Roller Type
03-With Lock Button
04-Flat Round Button

Ordering Code

MOV

Specification Code
Machine-Control, Hand-Control Valve

Overall Dimensions

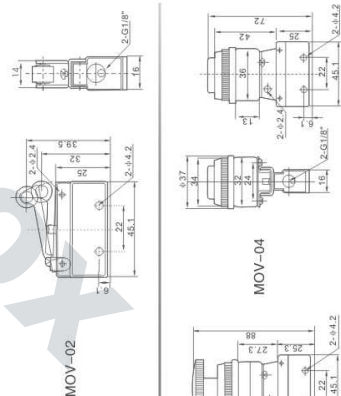

Specification

| Model | MOV-01 | MOV-02 | MOV-03 | MOV-04 |
|------------------------|----------------------|--------|--------|--------|
| Working Medium | Air | | | |
| Position and Way No. | Two-position Two-way | | | |
| Port Size | G1/8" | | | |
| Working-pressure Range | 0~0.8MPa | | | |
| Operating Temperature | 0~70°C | | | |

4R Series Hand-draw Valve



4R

Specification Code
4R-Two-position Five-way Hand-draw Valve
3R-Two-position Three-way Hand-draw Valve

2

Series Code
100 Series
200 Series
300 Series
400 Series

10

Number of Places
10-Single-head Double-position

06

Port Size
06-G1/8"
08-G1/4"
10-G3/8"
15-G1/2"

Specification

| Model | 4R110-06 | 4R310-10 | 4R410-15 | 3R110-06 | 3R210-08 | 3R310-10 | 3R410-15 |
|-----------------------------|-----------------------|----------|------------------------|----------|------------------------|----------|----------|
| Working Medium | Compress Air | | | | | | |
| Position and Way No. | Two-position Five-way | | Two-position Three-way | | Two-position Three-way | | |
| Joint Pipe Bore | G1/8" | G1/4" | G1/2" | G1/8" | G1/4" | G3/8" | G1/2" |
| Working-pressure Range | 0~1.0MPa | | | | | | |
| Operating Temperature Range | -5~60°C | | | | | | |
| Operating Method | Direct Action Type | | | | | | |
| Lubrication | Not Required | | | | | | |
| Overall Dimensions | / | | | | | | |

Overall Dimensions

