



**Adapter for MSC-R, 32 A**

**Part no.** MSFAR-32  
**Catalog No.** 191101  
**Eaton Catalog No.** MSFR-32  
**EL-Nummer** 1666808  
**(Norway)**


**Delivery program**

|                           |       |          |                                |
|---------------------------|-------|----------|--------------------------------|
| Product range             |       |          | Accessories                    |
| Accessories               |       |          | Busbar adapters                |
|                           |       |          | Approved to UL 508             |
| Rated operational voltage | $U_e$ | V        | 690                            |
| Rated operational current | $I_e$ | A        | 32                             |
| Terminal capacity         |       |          | AWG 10<br>(6 mm <sup>2</sup> ) |
| Adapter width             |       | mm       | 90                             |
| Adapter length            |       | mm       | 240                            |
| DIN rail                  |       | Quantity | 1                              |
| For use with              |       |          | MSC-R, 32 A                    |

**Technical data ETIM 7.0**

|   |  |    |                     |
|---|--|----|---------------------|
| Low-voltage industrial components (EG000017) / Busbar adapter (EC001531)  |  |    |                     |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Busbar trunking system (LV circuitry) / Busbar adapter (low-voltage switching technology)<br>(ecl@ss10.0.1-27-37-03-04 [ACN951011]) |  |    |                     |
| Mounting rail armament  |  |    | 1 mounting rail     |
| Type of electric connection   |  |    | 3 conductors AWG 10 |
| Rated current $I_n$   |  | A  | 32                  |
| Min. busbar thickness   |  | mm | 2                   |
| Max. busbar thickness   |  | mm | 2                   |
| Width of the adapter  |  | mm | 90                  |
| Rail width  |  | mm | 24                  |
| Busbar distance   |  | mm | 60                  |

## Dimensions

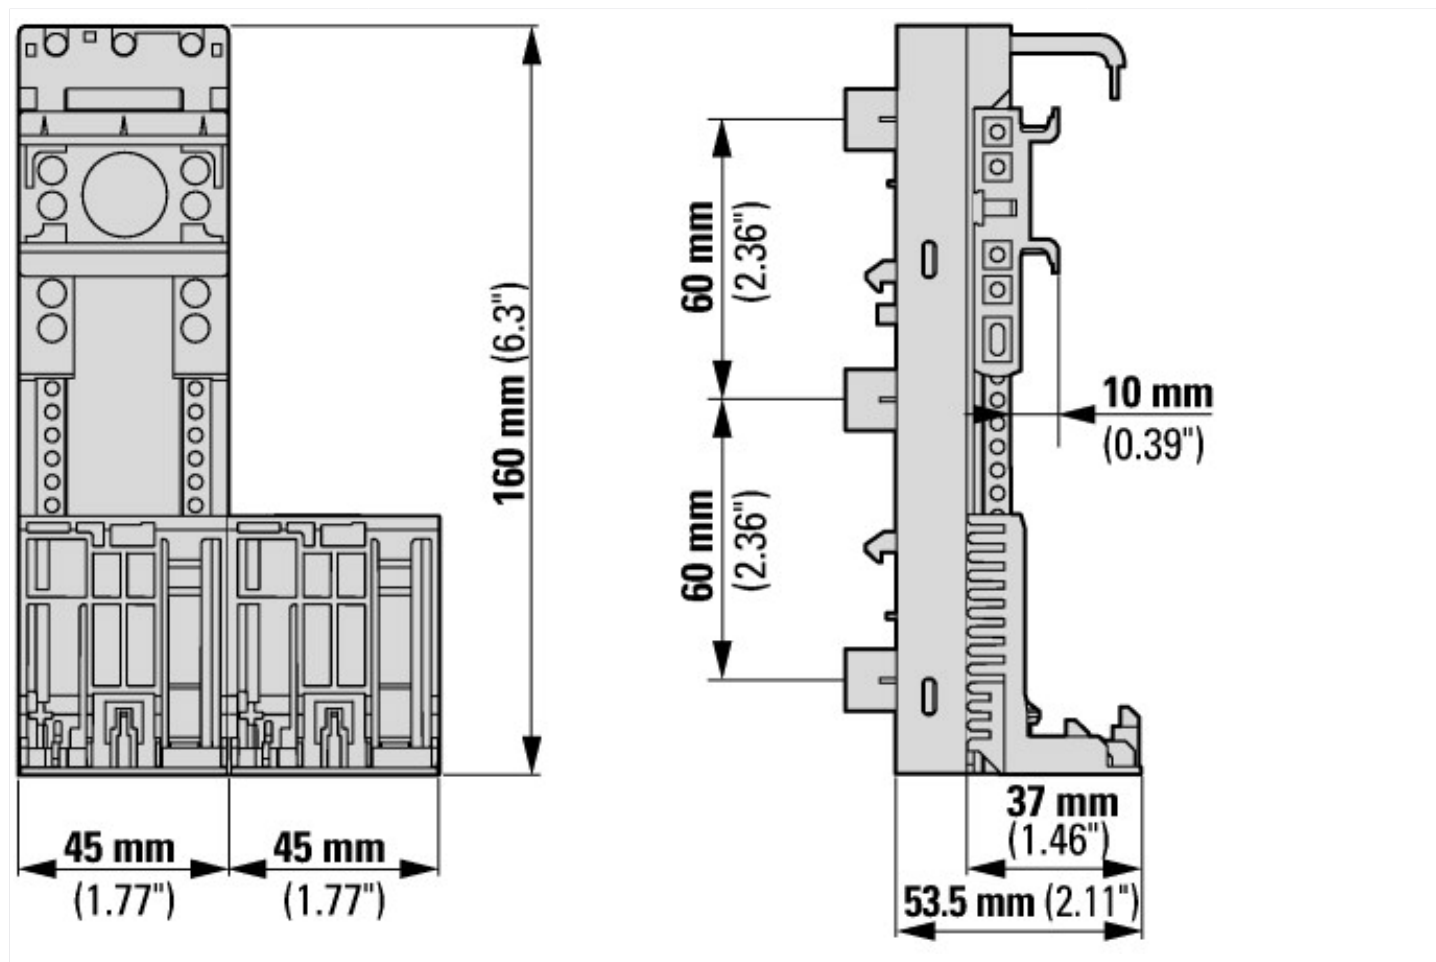

## Additional product information (links)

### IL015082ZU Adapter

IL015082ZU Adapter

[ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL015082ZU2018\\_05.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL015082ZU2018_05.pdf)

Motor starters and "Special Purpose Ratings" for the North American market

[http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct\\_3258146.pdf](http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf)

Busbar Component Adapters for modern Industrial control panels

[http://www.moeller.net/binary/ver\\_techpapers/ver960en.pdf](http://www.moeller.net/binary/ver_techpapers/ver960en.pdf)