



Incomer module, 3 pole, 1.5-16qmm, 80 A

Part no. **MSFI-80A**
 Catalog No. **191093**
 Eaton Catalog No. **MSFI-80A**
 EL-Nummer **1666809**
 (Norway)


Delivery program

Product range			Accessories
Accessories			feeder module
Material			Halogen free
Self-extinguishing			to UL 94
Track resistance			CTI 600
Temperature resistant			to 125 °C
Connection technique			Spring-loaded terminals
Width		mm	23
Pole			3
Rated operational current	I_e	A	80
Terminal capacity			
conductor			1.5 - 16 mm ² AWG 14 - 6
For use with			MSFB...

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Busbar terminal (EC000001)			
Electric engineering, automation, process control engineering / Electrical installation, device / Terminal (not overhead line) / Switch board (ecl@ss10.0.1-27-14-11-46 [BAA025013])			
Busbar thickness		mm	0 - 0
Busbar width		mm	0 - 0
Suitable for			Other
Width clamp		mm	23
Max. conductor cross section		mm ²	16
Max. rated operation current I_e		A	80
Suitable for round conductor connection			Yes
Suitable for sector conductor connection			No
Suitable for strip conductor connection			No

Dimensions

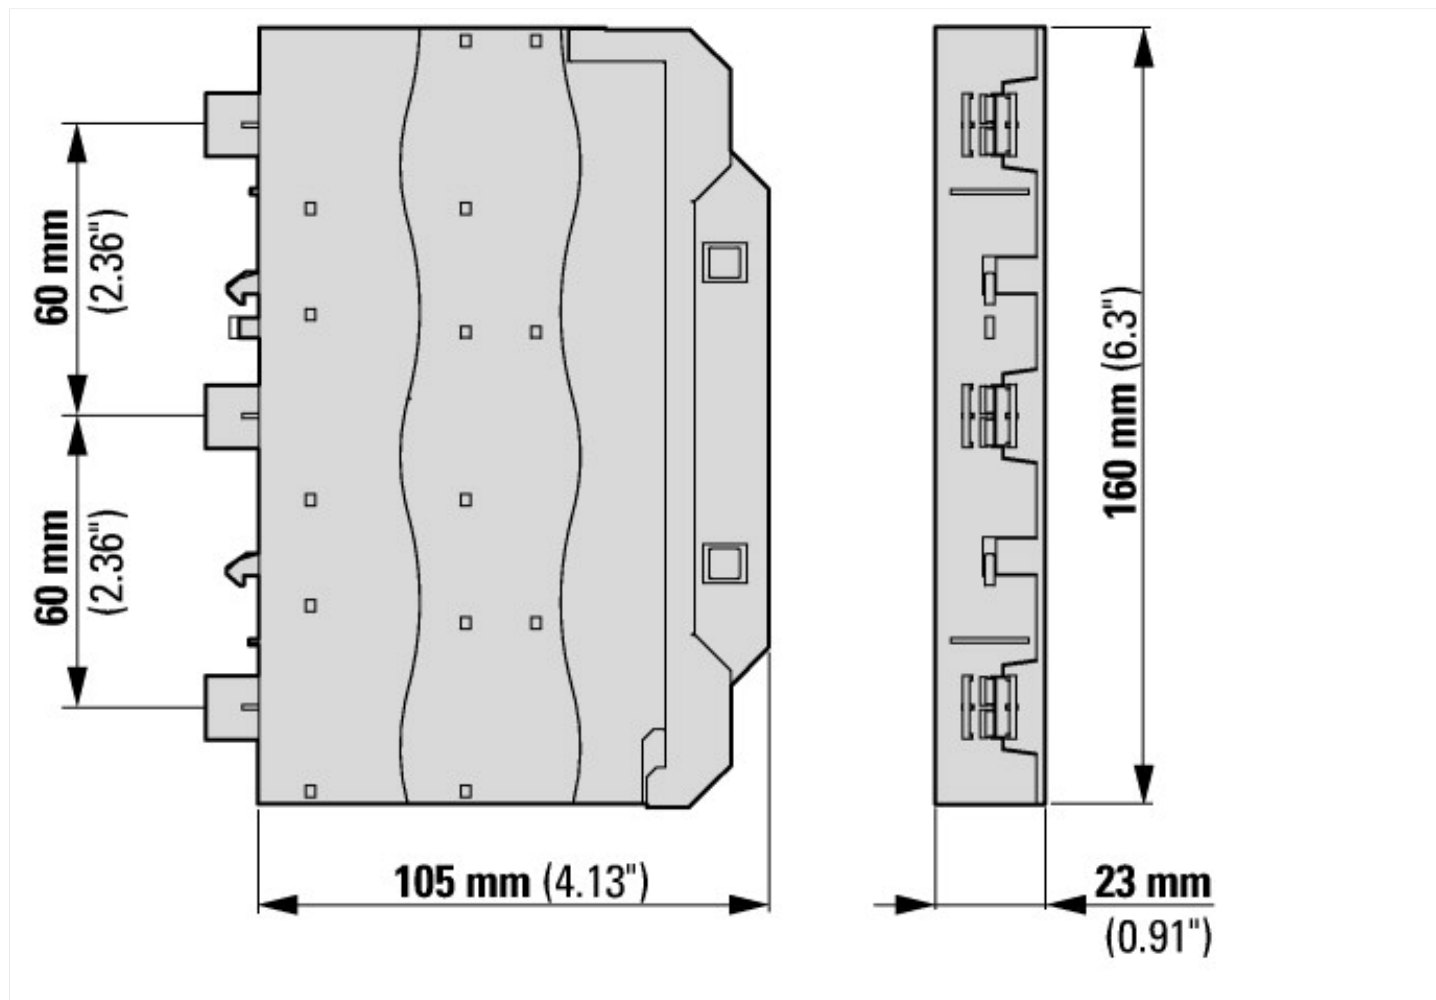

Additional product information (links)

IL015081ZU Incomer module

IL015081ZU Incomer module	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL015081ZU2018_05.pdf
Motor starters and "Special Purpose Ratings" for the North American market	http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf
Busbar Component Adapters for modern Industrial control panels	http://www.moeller.net/binary/ver_techpapers/ver960en.pdf