

4V、3V200 Series Solenoid Valve,4A、3A 200 Series Pneumatic Control Valve



Ordering Code

4V 2 10 08 AC220V

Specification Code 4V:Two(Three)-position Five-way Solenoid Valve 4A:Two(Three)-position Five-way pneumatic control valve 3V:Two-position Three-way Solenoid Valve 3A:Two-position Three-way Pneumatic Control Valve	Series Code 200 Series	Coil and Places 10:Single-head double-position 20:Double-head double-position 30C:Double-head Three-position Close Type 30E:Double-head Three-position Exhaust Type 30P:Double-head Three-position Pressure Type	Port Size 06:G1/8" 08:G1/4"	Port connection and Initial State NC:Two-position Three-way Normal Close Type NO:Two-position Three-way Normal Open Type	Standard Voltage DC12V DC24V AC24V 50Hz/60Hz AC110V 50Hz/60Hz AC220V 50Hz/60Hz AC380V 50Hz/60Hz	Wiring Form Blank:Standard Connector LD:Brown With Lighting Connector LD1:White With Lighting Connector W:Lead Wire Type
---	----------------------------------	--	--	---	--	---

Specification




Model	4V210-06	4V220-06	4V230C-06	4V230E-06	4V230P-06	4V210-08	4V220-08	4V230C-08	4V230E-08	4V230P-08
Position and Way NO.	Two-position Five-way		Three-position Five-way			Two-position Five-way		Three-position Five-way		
Effective Sectional Area	14mm ² (CV=0.78)		12mm ² (CV=0.67)			16mm ² (CV=0.89)		12mm ² (CV=0.67)		

Model	3V210-06	3V220-06	3A210-06	3A220-06	3V210-08	3V220-08	3A210-08	3A220-08
Position and Way NO.	Two-position Three-way				Two-position Three-way			
Effective Section Area	14mm ² (CV=0.78)				16mm ² (CV=0.89)			
Joint Pipe Bore	Air Inlet=Air Outlet=Exhaust=G1/8"				Air Inlet=Air Outlet 1/4" Exhaust=G1/1/8"			

Working Medium	40 Micron Filtered Air
Motion Pattern	Inner Guide Type
Working-pressure	0.15~0.8 M Pa
Max. Pressure Resistance	1.2MPa
Operating Temperature	5~50 C
Voltage Range	±10%
Power Consumption	AC: 2.5VA DC: 2.5W
Insulation & Protection Class	F Class. IP65
Wiring Form	Lead Wire or Connector type
Highest Action Frequency	5 Cycle / Sec
Shortest Excitation Time	0.05 Second

4V、3V200 Series Solenoid Valve,4A、3A200 Series Pneumatic Control Valve


Overall Dimensions

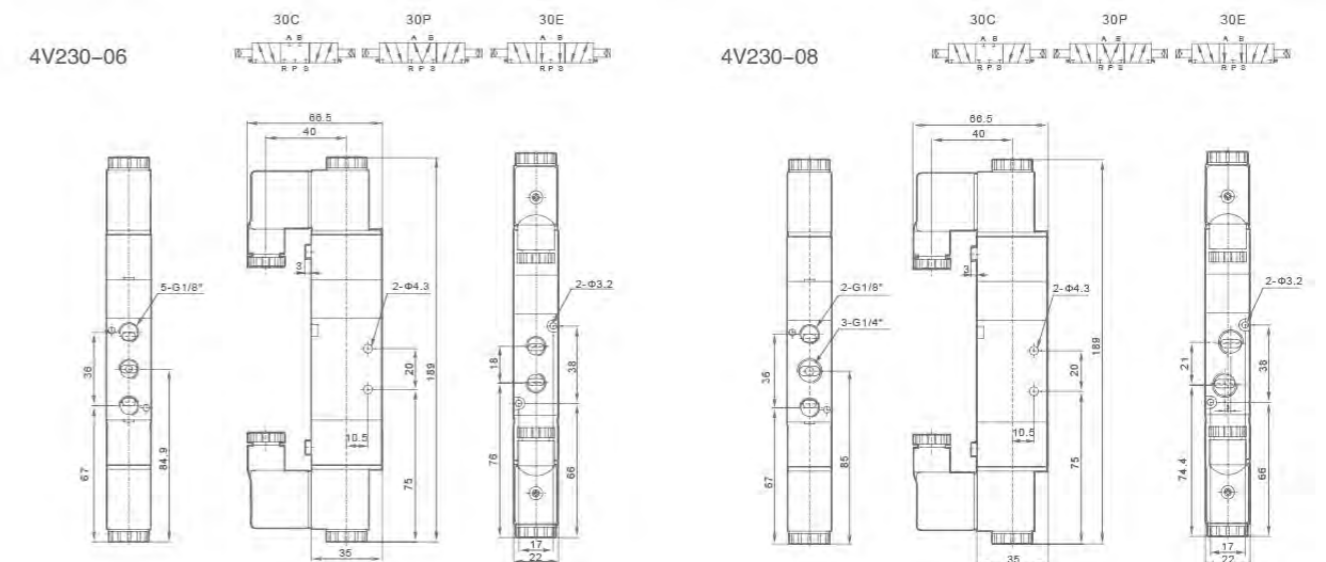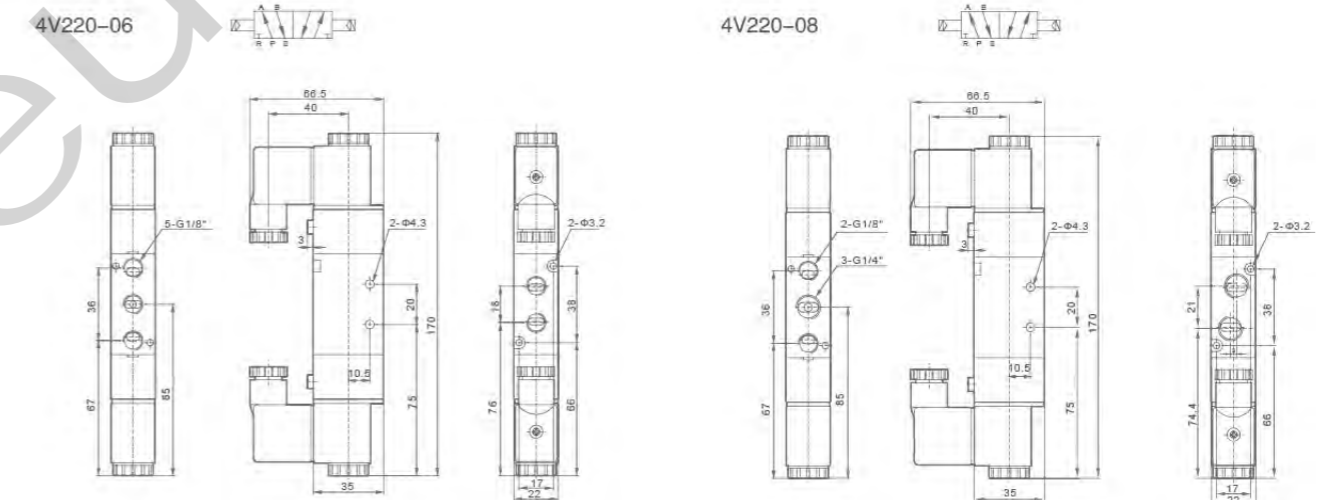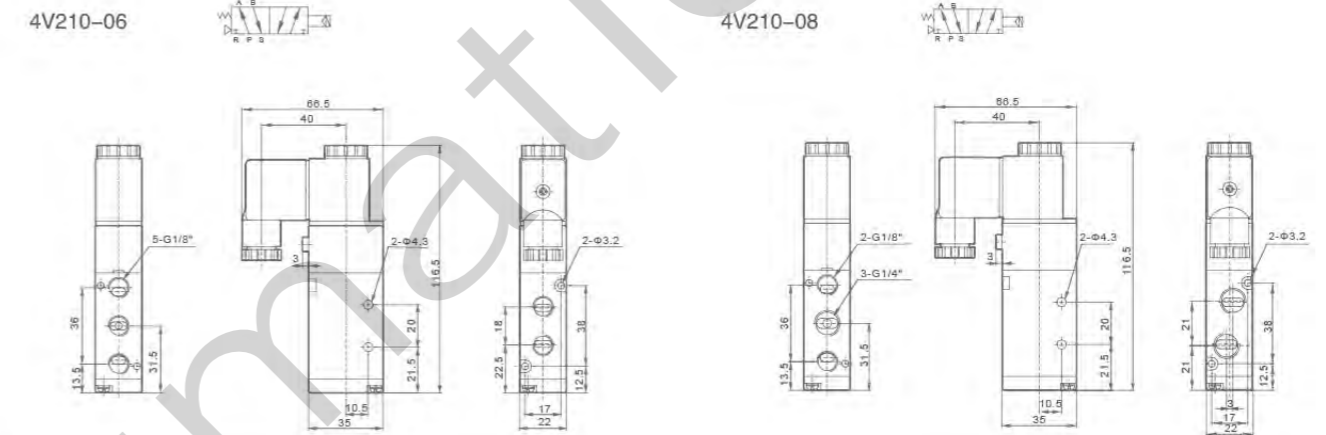


4V、3V200 Series Solenoid Valve, 4A、3A 200 Series Pneumatic Control Valve

Overall Dimensions



4A210-06

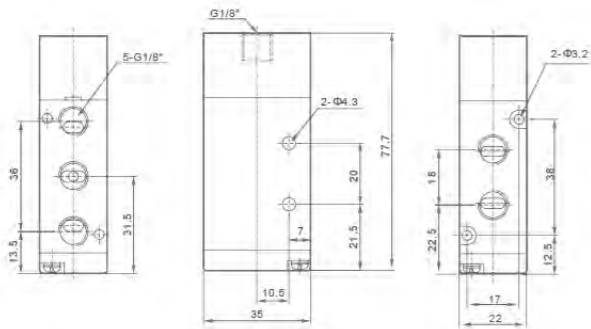



4A210-08

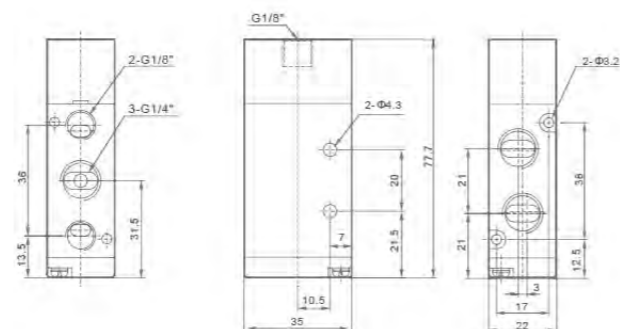



4A220-06

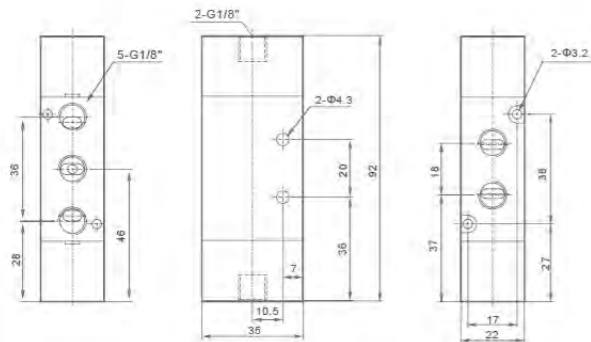


4A220-08

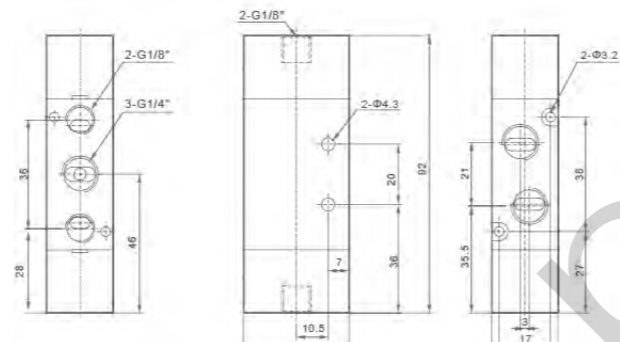

4A230-06

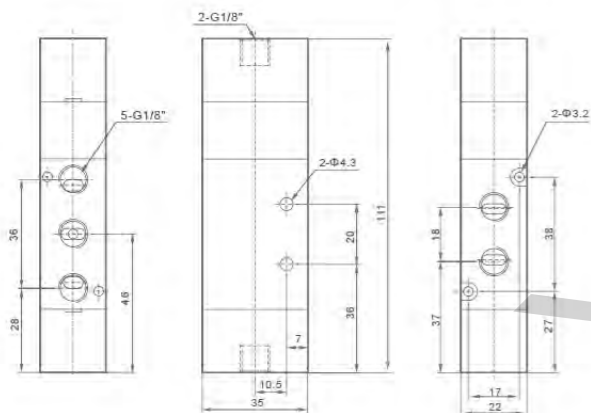



4A230-08

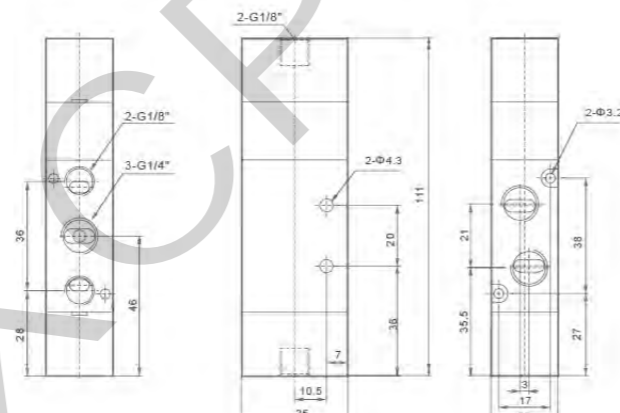



4V、3V200 Series Solenoid Valve, 4A、3A 200 Series Pneumatic Control Valve

Overall Dimensions


3V210-06

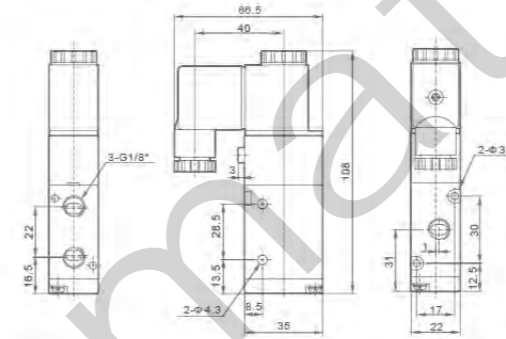



3V210-08

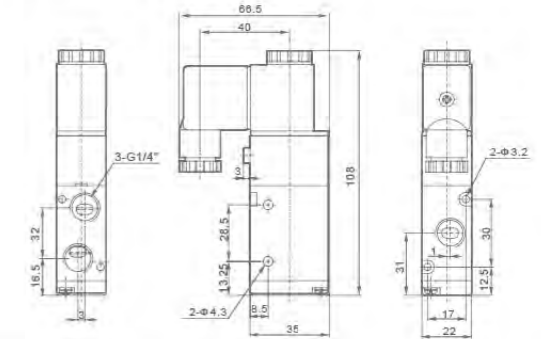



3V220-06

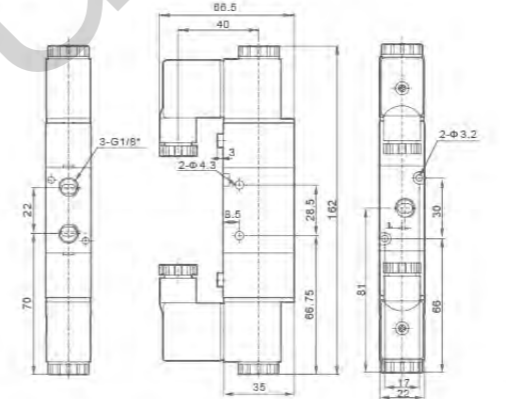



3V220-08

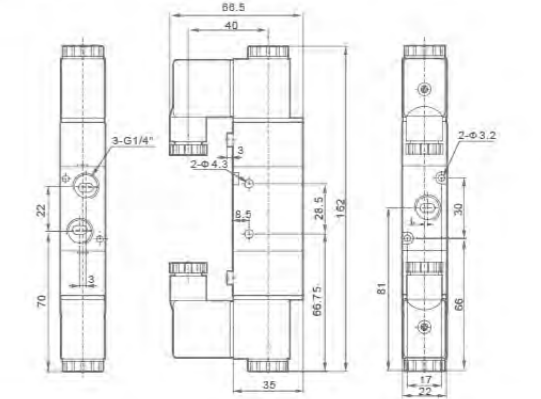



3A210-06

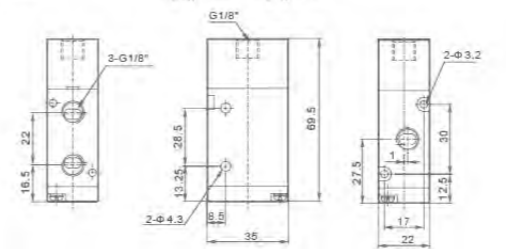

3A210-08

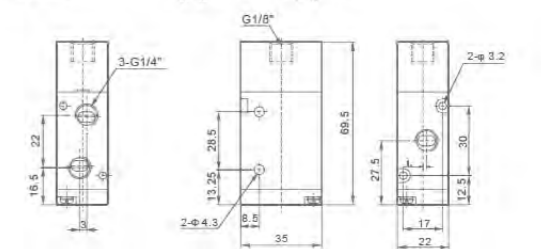

3A220-06

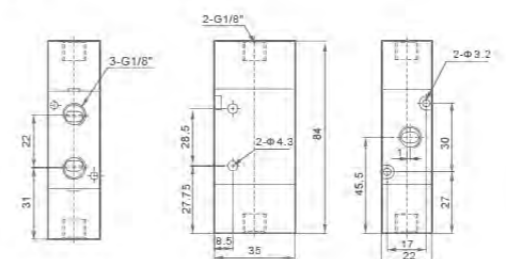

3A220-08

