



HOLDER FOR STAND-ALONE INSTALL. FOR  
3RU11/3RB10 SIZE S0 STAND-ALONE INSTALLATION  
MAIN CIRC.: SCREW TERMINAL AUX.CIRC.: --

#### General technical data:

<b>product brand name</b>		SIRIUS
<b>Product designation</b>		individual mount
<b>Size of contactor</b>		S0
<b>Size of overload relay</b>		S0
<b>Ambient temperature</b>		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +70

#### Installation/mounting/dimensions:

<b>Mounting type</b>		screw and snap-on mounting onto 35 mm standard mounting rail
<b>Width</b>	mm	45

#### Connections:

<b>Design of the electrical connection</b>		
• for main current circuit		screw-type terminals
<b>Type of connectable conductor cross-section</b>		
• for main contacts		
• solid		1 ... 10 mm <sup>2</sup>
• finely stranded		

- with core end processing
- for AWG conductors
- for main contacts

1 ... 6 mm<sup>2</sup>

1x (16 ... 8)

**General Product Approval**

**Test Certificates**



[Special Test Certificate](#)

**Shipping Approval**

**other**



[Declaration of Conformity](#)

[Environmental Confirmations](#)

**Further information:**

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrial-controls/mall>

**CAX-Online-Generator**


<http://www.siemens.com/cax>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3RU1926-3AA01/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RU1926-3AA01](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RU1926-3AA01)

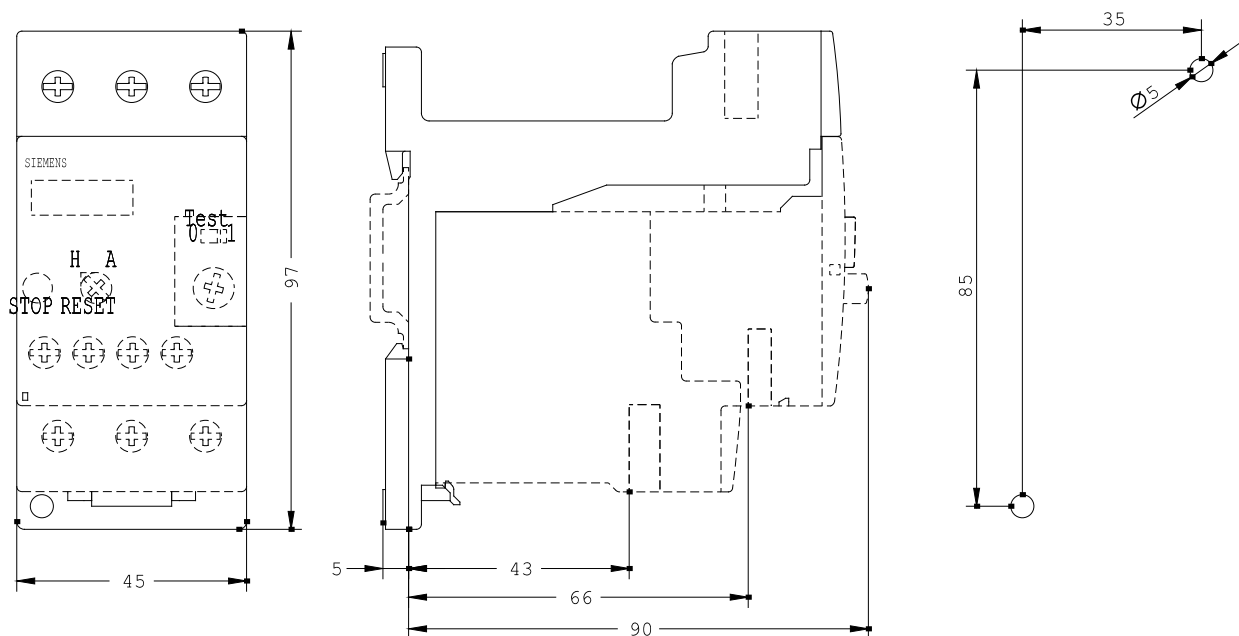

last change:

Nov 17, 2014