



Timing relay, 1W, 0.05s-60h, on-delayed, 24-240VAC/DC


Part no. DILET11-M-A
Article no. 048886
Catalog No. XTMT6A60H11B

Delivery programme

| | | | |
|-------------------------------|--|--|-----------------------------------------------------------------------------------------------------------------------------|
| Product range | | | DILET timing relays |
| Basic function | | | Timer relays |
| Function | | | On-delayed |
| | | | Fixed timing function |
| Number of changeover contacts | | | 1 |
| Time range | | | 0.05 s - 60 h |
| Time range | | | 0.15 - 3 s 0.5 - 10 s 3 - 60 s u0.15 - 3 min 0.5 - 10 min 3 - 60 min 0.15 - 3 h 0.5 - 10 h 3 - 60 h |

Rated operational current

| | | | |
|-------------------|----------|----|------------------------------------------|
| AC-11 | | | |
| 230 V | I_e | A | 3 |
| 380 V 400 V 415 V | I_e | A | 3 |
| AC-15 | | | |
| 220 V 230 V 240 V | I_e | A | 3 |
| Voltage range | U_{LN} | V | 24 - 240 V AC, 50/60 Hz 24 - 240 V DC |
| Width | | mm | 45 |



Terminal marking according to EN 50042

Technical data

General

| | | | |
|-------------------------------------------------|------------|-----------------|--------------------------------------------------------------------------------|
| Standards | | | Standard IEC/EN 61812 VDE 0435 |
| Lifespan, mechanical | | | |
| AC operated | Operations | $\times 10^6$ | 30 |
| DC operated | Operations | $\times 10^6$ | 30 |
| Climatic proofing | | | Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature | | | |
| Open | | °C | -20 - +60 |
| Enclosed | | °C | -20 - +45 |
| Mounting position | | | As required |
| Mechanical shock resistance (IEC/EN 60068-2-27) | | | |
| Half-sinusoidal shock, 20 ms | | g | |
| Make contact | | g | 4 |
| Degree of protection | | | |
| Terminals | | | IP20 |
| Weight | | kg | 0.09 |
| Terminal capacities | | mm ² | |
| Solid | | mm ² | 1 x (0.75 - 2.5) 2 x (0.75 - 2.5) |
| Flexible with ferrule | | mm ² | 1 x (0.75 - 1.5) 2 x (0.75 - 1.5) |

| | | | |
|---------------------------------------|-----------|---------|-----------------------------------------------------------------|
| Solid or stranded | | AWG | 1 x (18 - 14) |
| Contacts | | | |
| Rated impulse withstand voltage | U_{imp} | V AC | 6000 |
| Overvoltage category/pollution degree | | | III/2 |
| Rated insulation voltage | U_i | V AC | 600 |
| Rated operational voltage | U_e | V AC | 440 |
| Safe isolation to EN 61140 | | | |
| between coil and auxiliary contacts | | V AC | 250 |
| between the auxiliary contacts | | V AC | 250 |
| Making capacity | | | |
| AC-14 $\cos \varphi = 0.3$ 400 V | | A | 48 |
| AC-15 $\cos \varphi = 0.3$ 220 V | | A | 50 |
| DC-11 L/R - 40 ms | | $x I_e$ | 1.1 |
| Breaking capacity | | | |
| AC-14 $\cos \varphi = 0.3$ 440 V | | A | 3 |
| AC-15 $\cos \varphi = 0.3$ 220 V | | A | 3 |
| DC-11 L/R - 40 ms | | $x I_e$ | 1.1 |
| Rated operational current | I_e | A | |
| AC--14 | | | |
| 440 V | I_e | A | 3 |
| AC-15 | | | |
| 220 V 230 V 240 V | I_e | A | 3 |
| DC-11 | | | |
| Note | | | Making and breaking conditions to DC13, time constant as stated |
| L/R max. 15 ms | | A | |
| 24 V | I_e | A | 1.5 |
| L/R max. 50 ms | | A | 1.2 |
| Conv. thermal current | I_{th} | A | 6 |
| Short-circuit rating without welding | | | |
| Note | | | When supplied directly from mains or transformer > 1000 VA |
| Max. fuse, make contacts | | A gG/gL | 6 |
| Max. fuse, break contacts | | A gG/gL | 6 |

Magnet systems

| | | | |
|---------------------------------------|-------|---------|------------|
| Rated operational voltage | U_e | V | |
| AC | | | 24 - 240 |
| DC | | | 24 - 240 |
| Voltage tolerance | | $x U_c$ | |
| Pick-up voltage | | $x U_s$ | |
| Min. pick-up voltage, AC operated | | $x U_c$ | 0.85 |
| Pick-up voltage AC operated, max. | | $x U_c$ | 1.1 |
| Pick-up voltage DC operated, min. | | $x U_c$ | 0.7 |
| Max. pick-up voltage, DC operated | | $x U_c$ | 1.1 |
| Power consumption | | | |
| Pick-up AC | | VA | 2 |
| Sealing AC | | VA | 2 |
| Pick-up DC | | W | 1.8 |
| Sealing DC | | W | 1.8 |
| Duty factor | | % DF | 100 |
| Maximum operating frequency | | Ops/h | 4000 |
| Minimum command time | | | |
| AC | | ms | 50 |
| DC | | ms | 30 |
| Repetition accuracy (deviation) | | % | ≤ 0.5 |
| Recovery time (after 100% time delay) | | ms | 70 |

Design verification as per IEC/EN 61439

| Technical data for design verification | | | |
|------------------------------------------------------------------------------------------------------------------------|------------|----|----------------------------------------------------------------------------------------------------------------------------------|
| Rated operational current for specified heat dissipation | I_n | A | 6 |
| Heat dissipation per pole, current-dependent | P_{vid} | W | 0.9 |
| Equipment heat dissipation, current-dependent | P_{vid} | W | 0 |
| Static heat dissipation, non-current-dependent | P_{vs} | W | 1.8 |
| Heat dissipation capacity | P_{diss} | W | 0 |
| Operating ambient temperature min. | | °C | -20 |
| Operating ambient temperature max. | | °C | 60 |
| IEC/EN 61439 design verification | | | |
| 10.2 Strength of materials and parts | | | |
| 10.2.2 Corrosion resistance | | | |
| | | | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures | | | |
| | | | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat | | | |
| | | | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects | | | |
| | | | Meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation | | | |
| | | | Meets the product standard's requirements. |
| 10.2.5 Lifting | | | |
| | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact | | | |
| | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions | | | |
| | | | Meets the product standard's requirements. |
| 10.3 Degree of protection of ASSEMBLIES | | | |
| | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.4 Clearances and creepage distances | | | |
| | | | Meets the product standard's requirements. |
| 10.5 Protection against electric shock | | | |
| | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components | | | |
| | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 Internal electrical circuits and connections | | | |
| | | | Is the panel builder's responsibility. |
| 10.8 Connections for external conductors | | | |
| | | | Is the panel builder's responsibility. |
| 10.9 Insulation properties | | | |
| 10.9.2 Power-frequency electric strength | | | |
| | | | Is the panel builder's responsibility. |
| 10.9.3 Impulse withstand voltage | | | |
| | | | Is the panel builder's responsibility. |
| 10.9.4 Testing of enclosures made of insulating material | | | |
| | | | Is the panel builder's responsibility. |
| 10.10 Temperature rise | | | |
| | | | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating | | | |
| | | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.12 Electromagnetic compatibility | | | |
| | | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.13 Mechanical function | | | |
| | | | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |

Technical data ETIM 6.0


| Relays (EG000019) / Timer relay (EC001439) | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------|
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Relay and socket / Timed relay (ecI@ss8.1-27-37-16-05 [AKF092010]) | | |
| Type of electric connection | | Screw connection |
| Function delay-on energization | | Yes |
| Function delay on de-energization | | No |
| Function floating contact on energization | | No |
| Function floating contact on de-energization | | No |
| Function star-delta | | No |
| Function pulse shaping | | No |
| Function flashing, starting with pause, fixed time | | No |
| Function flashing, starting with pulse, fixed time | | No |
| Clock function, starting with pause, variable | | No |
| Clock function, starting with pulse, variable | | No |
| With plug-in socket | | No |
| Remote operation possible | | No |
| Suitable only for remote control | | No |
| Pluggable on auxiliary contact block | | No |

| | | |
|-------------------------------------------------------|----|---------------|
| Rated control supply voltage Us at AC 50HZ | V | 24 - 240 |
| Rated control supply voltage Us at AC 60HZ | V | 24 - 240 |
| Rated control supply voltage Us at DC | V | 24 - 240 |
| Voltage type for actuating | | AC/DC |
| Time range | s | 0.05 - 216000 |
| Number of outputs, undelayed, normally closed contact | | 0 |
| Number of outputs, undelayed, normally open contact | | 0 |
| Number of outputs, undelayed, change-over contact | | 1 |
| Number of outputs, delayed, normally closed contact | | 0 |
| Number of outputs, delayed, normally open contact | | 0 |
| Number of outputs, delayed, change-over contact | | 1 |
| Outputs, reversible delayed/undelayed | | Yes |
| With semiconductor output | | No |
| Width | mm | 60 |
| Height | mm | 60 |
| Depth | mm | 47 |

Approvals

| | | |
|-----------------------------|--|-----------------------------------------------------------------------|
| Product Standards | | IEC/EN 61812-1; IEC/EN 60947-5-1; UL 508; CSA-22.2 No. 14; CE marking |
| UL File No. | | E29184 |
| UL Category Control No. | | NKCR, NKCR7 |
| CSA File No. | | 12528 |
| CSA Class No. | | 3211-03 |
| North America Certification | | UL listed, CSA certified |
| Degree of Protection | | IEC: IP20, UL/CSA Type: - |

Characteristics

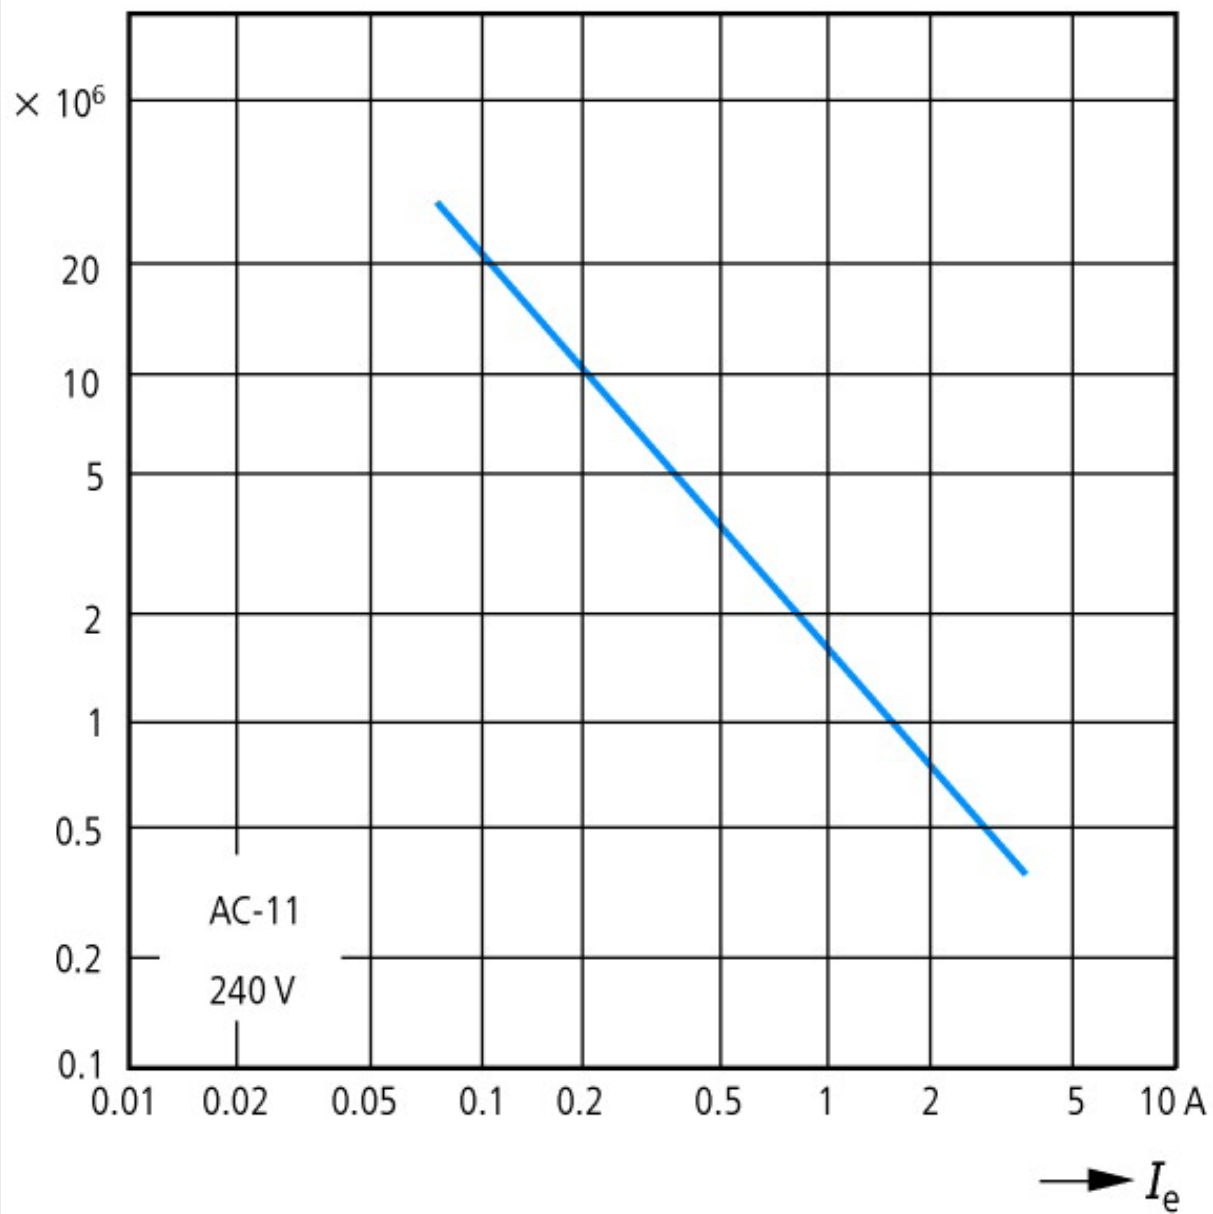

Component lifespan (operations)

I_e = Rated operational current

Flow diagram for timing functions

LED legend



Time not running, contact 15 – 18 closed



Time running, contact 15 – 18 closed




Time running, contact 15 – 18 not closed


① A2/A1 linked

② A2/A1 not linked

11 On-delayed

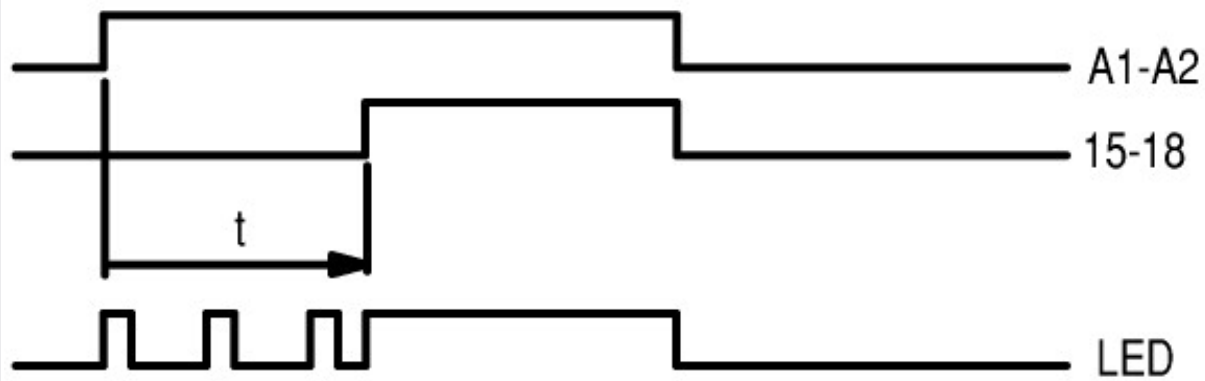

Dimensions

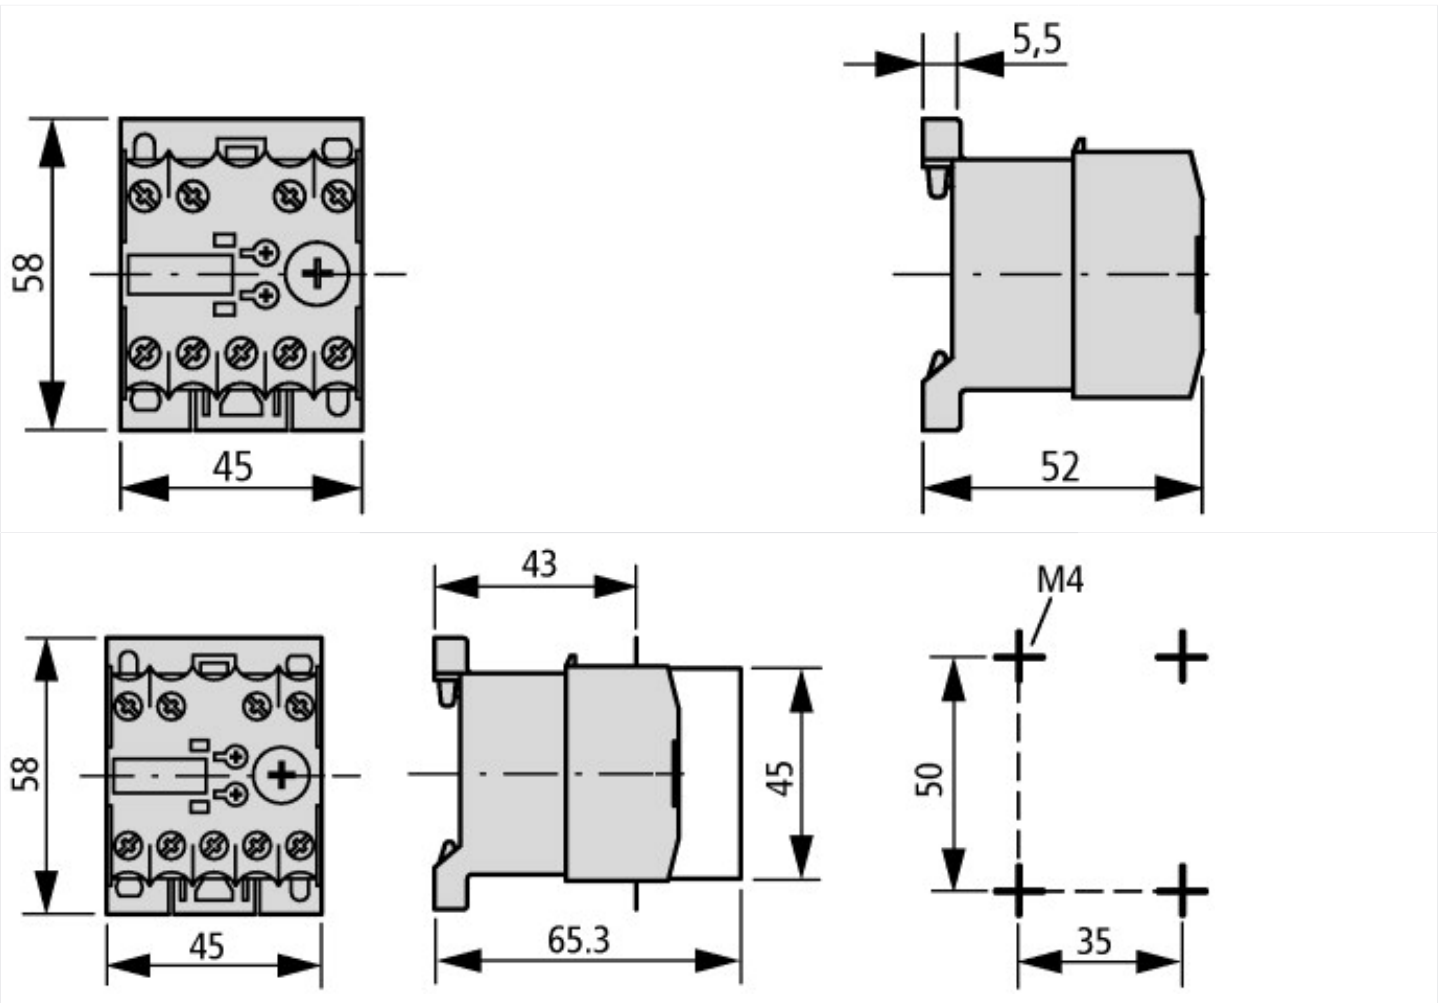

Electronic timing relay with sealable shroud
DILET... + HDILE

Additional product information (links)

IL04910003Z (AWA2527-1587) Solid-state timing relay

IL04910003Z (AWA2527-1587) Solid-state timing relay ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL04910003Z2010_10.pdf