


Type: **DILM225-XKU-S**
 Article No.: **208294**

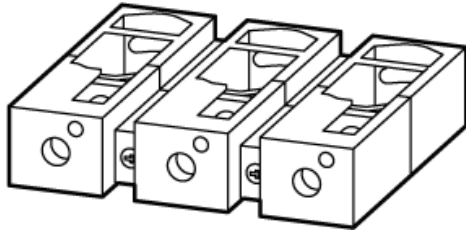

With control circuit terminal

Ordering information

For use with			DILM185 DILM225
--------------	--	--	--------------------

Notes concerning the product group

For connection of: Round conductor, flexible and stranded, flat strip conductor

Terminal capacity, → Technical data, General Information in the Electronic Catalogue

Cable terminal block, flat cable terminal

Terminal capacities			
Stranded		mm ²	1 × (16 – 185) 2 × (16 – 150)
stranded		AWG	1 × (6 – 350 MCM) 2 × (6 – 300 MCM)
Flat conductor	Number of segments × width × thickness	mm	1 × (3 × 9 × 0.8) 2 × (10 × 16 × 0.8)
Terminal capacity control circuit cables			
Solid		mm ²	1 × (0.75 – 4) 2 × (0.75 – 4)
Flexible with ferrule		mm ²	1 × (0.75 – 2.5) 2 × (0.75 – 2.5)


Notes

			Making and breaking conditions to DC-13, time L/R constant as stated See "Fuses" overlay for time/current characteristic (on request)
--	--	--	--

Dimensions

For DILM185 to DILM250

Dimensions

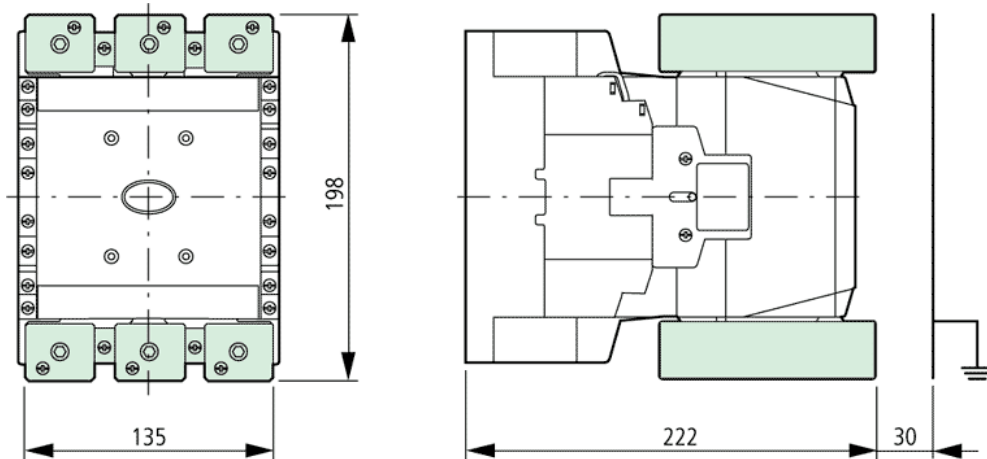

Moeller GmbH, Hein-Moeller-Str. 7-11, D-53115 Bonn

E-Mail: catalog@moeller.net, Internet: www.moeller.net, <http://catalog.moeller.net>

Copyright 2006 by Moeller GmbH. Subject to modifications. HPL-C2006GB-INT V2.3