



## Pushbutton, without button plate, protected



**Part no.** M22-DG-X  
**Article no.** 220921  
**Catalog No.** M22-DG-XQ

### Delivery programme

|  |   |  |   |
|--|---|--|---|
| Product range  |   |  | RMQ-Titan (drilling dimensions 22.5 mm) |
| Basic function   |   |  | Pushbutton actuators                    |
| Single unit/Complete unit  |   |  | Single unit                             |
| Design   |   |  | Guard-ring<br>momentary                 |
| <b>Button plate</b>  |   |  |   |
|  |   |  | Without button plate                    |
| Degree of Protection   |   |  | IP67, IP69K                             |
| Front ring   |   |  | Front ring: titanium                    |
| Connection to SmartWire-DT   |   |  | Yes, with SWD-RMQ connections           |
| <b>Actuator travel and actuation force as per DIN EN 60947-5-1, K5.4.1</b> |   |  |   |
| Minimum force for positive opening   | N |  | 0                                       |
| Front dimensions   |   |  | 22 x 22                                 |

### Technical data

#### General

|                             |              |               |  |
|-----------------------------|--------------|---------------|--|
| Standards                   |              |               | IEC/EN 60947<br>VDE 0660   |
| Lifespan, mechanical        | Operations   | $\times 10^6$ | > 5  |
| Operating frequency         | Operations/h |               |  3600 |
| Actuating force             |              | n             |  5    |
| Climatic proofing           |              |               | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30           |
| Ambient temperature         |              |               |  |
| Open                        |              | °C            | -25 - +70  |
| Storage                     |              | °C            | -40 - +80  |
| Mounting position           |              |               | As required  |
| Mechanical shock resistance |              | g             | 30<br>Shock duration 11 ms<br>Sinusoidal<br>according to IEC 60068-2-27                  |

### Design verification as per IEC/EN 61439

|  |            |    |  |
|--|------------|----|--|
| Technical data for design verification   |            |    |  |
| Rated operational current for specified heat dissipation   | $I_n$      | A  | 0  |
| Heat dissipation per pole, current-dependent   | $P_{vid}$  | W  | 0  |
| Equipment heat dissipation, current-dependent  | $P_{vid}$  | W  | 0  |
| Static heat dissipation, non-current-dependent   | $P_{vs}$   | W  | 0  |
| Heat dissipation capacity  | $P_{diss}$ | W  | 0  |
| Operating ambient temperature min.   |            | °C | -25  |
| Operating ambient temperature max.   |            | °C | 70   |
| IEC/EN 61439 design verification   |            |    |  |
| 10.2 Strength of materials and parts   |            |    |  |
| 10.2.2 Corrosion resistance  |            |    | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures   |            |    | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |            |    | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |            |    | Meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |            |    | Please enquire                             |

|  |  |  |
|--|--|--|
| 10.2.5 Lifting   |  | Does not apply, since the entire switchgear needs to be evaluated.                                       |
| 10.2.6 Mechanical impact                                 |  | Does not apply, since the entire switchgear needs to be evaluated.                                       |
| 10.2.7 Inscriptions                                      |  | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES                  |  | Does not apply, since the entire switchgear needs to be evaluated.                                       |
| 10.4 Clearances and creepage distances                   |  | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock                   |  | Does not apply, since the entire switchgear needs to be evaluated.                                       |
| 10.6 Incorporation of switching devices and components   |  | Does not apply, since the entire switchgear needs to be evaluated.                                       |
| 10.7 Internal electrical circuits and connections        |  | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors                 |  | Is the panel builder's responsibility.   |
| 10.9 Insulation properties                               |  |  |
| 10.9.2 Power-frequency electric strength                 |  | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage                         |  | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material |  | Is the panel builder's responsibility.   |
| 10.10 Temperature rise                                   |  | Not applicable.  |
| 10.11 Short-circuit rating                               |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.           |
| 10.12 Electromagnetic compatibility                      |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.           |
| 10.13 Mechanical function                                |  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |

## Technical data ETIM 6.0

Low-voltage industrial components (EG000017) / Front element for push button (EC000221)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Command and alarm device / Front element for push-button actuators (ecl@ss8.1-27-37-12-10 [AKF028011])


|                                       |    |                      |
|---------------------------------------|----|----------------------|
| Colour button                         |    | Without button plate |
| Number of command positions           |    | 1                    |
| Construction type lens                |    | Round                |
| Hole diameter                         | mm | 22                   |
| Width opening                         | mm | 22                   |
| Height meter opening                  | mm | 6                    |
| Degree of protection (IP), front side |    | IP67                 |
| Type of button                        |    | Flat                 |
| Suitable for illumination             |    | No                   |
| With protection cover                 |    | No                   |
| Labelled                              |    | No                   |
| Switching function latching           |    | No                   |
| Spring-return                         |    | Yes                  |
| With front ring                       |    | Yes                  |
| Material front ring                   |    | Plastic              |
| Colour front ring                     |    | Chrome               |

## Approvals

|                             |  |  |
|-----------------------------|--|--|
| Product Standards           |  | IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94-91; CE marking |
| UL File No.                 |  | E29184   |
| UL Category Control No.     |  | NKCR   |
| CSA File No.                |  | 012528   |
| CSA Class No.               |  | 3211-03  |
| North America Certification |  | UL listed, CSA certified   |
| Degree of Protection        |  | UL/CSA Type 3R, 4X, 12, 13   |

## Dimensions

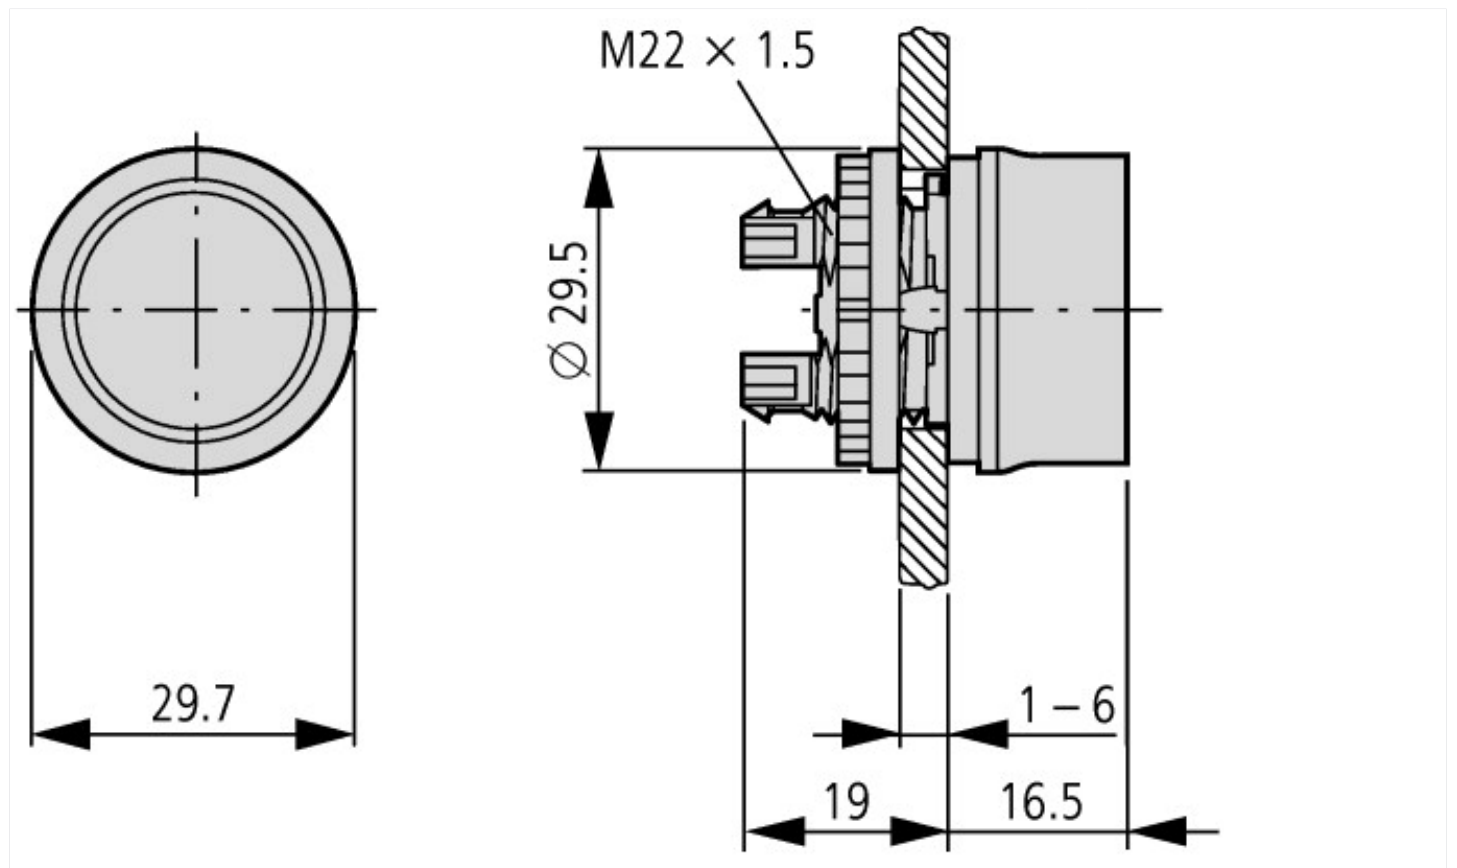

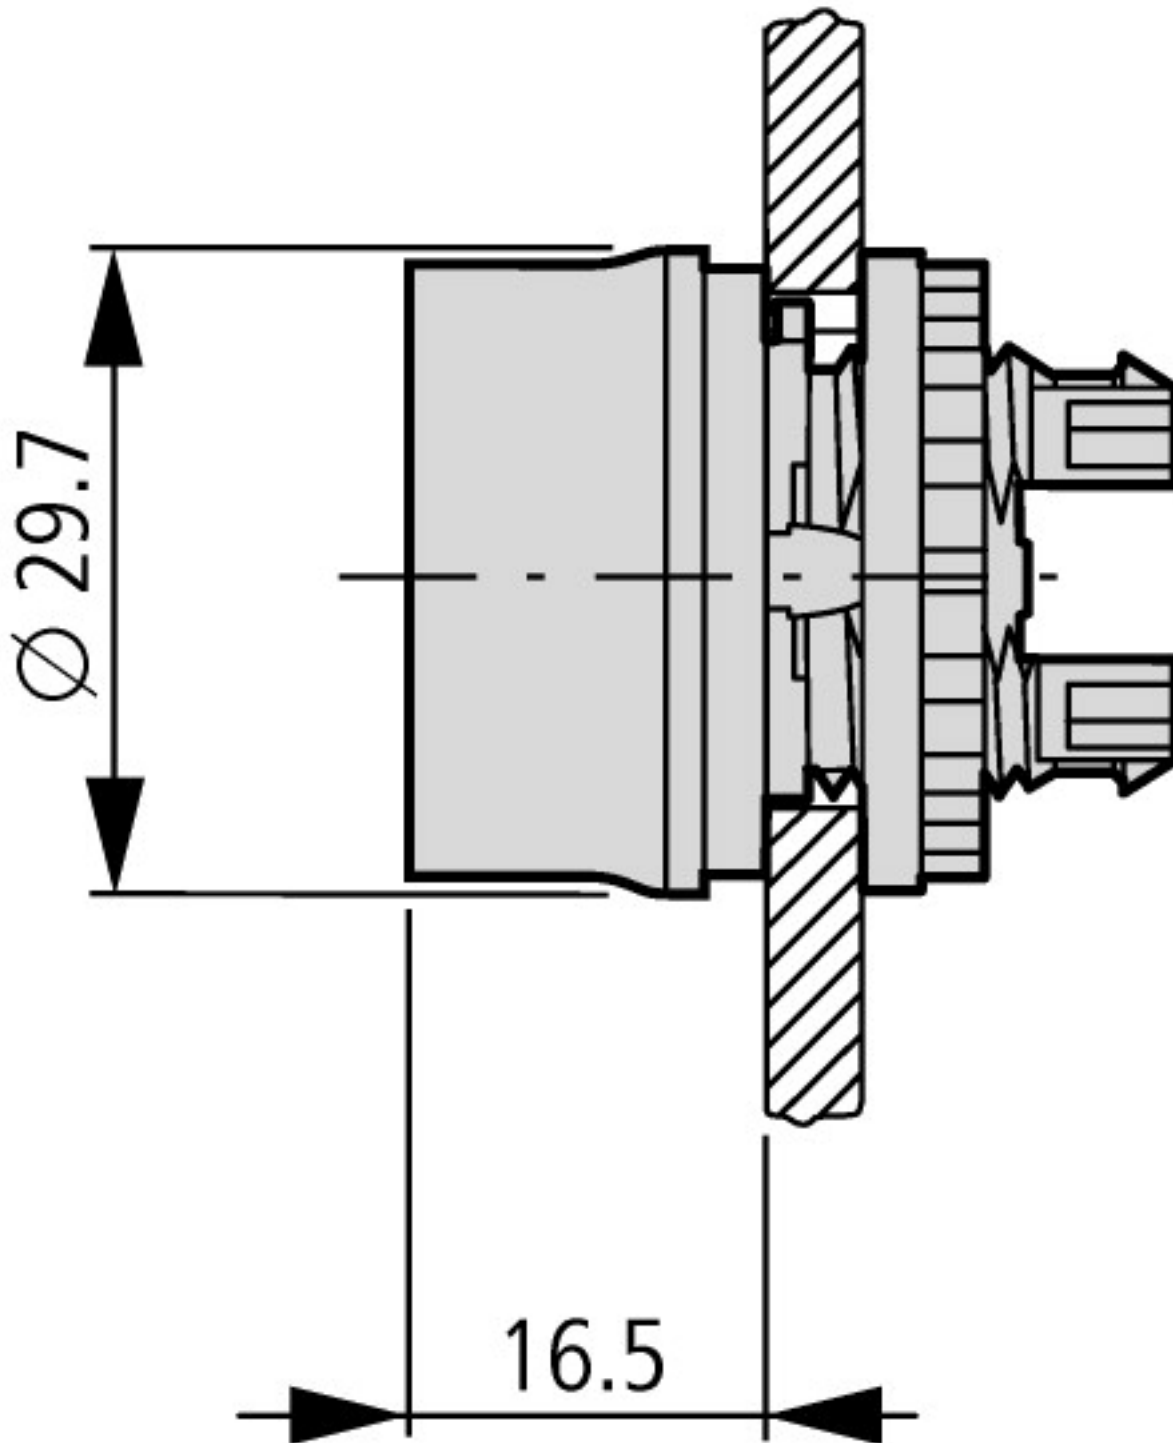

### Additional product information (links)

**IL04716002Z (AWA1160-1745) RMQ-Titan System**

IL04716002Z (AWA1160-1745) RMQ-Titan System

[ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL04716002Z2015\\_02.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL04716002Z2015_02.pdf)