



**MSFS adapter for PKZM0/PKE32, 32A**

**Part no.** MSFA0-32  
**Catalog No.** 191095  
**Eaton Catalog No.** MSF0-32  
**EL-Nummer** 1666811  
**(Norway)**


**Delivery program**

Product range			Accessories
Accessories			Busbar adapters
			Approved to UL 508
Rated operational voltage	$U_e$	V	690
Rated operational current	$I_e$	A	32
Terminal capacity			AWG 10 (6 mm <sup>2</sup> )
Adapter width		mm	45
Adapter length		mm	160
DIN rail		Quantity	1
For use with			PKZM0/PKE32

**Technical data ETIM 7.0**

Low-voltage industrial components (EG000017) / Busbar adapter (EC001531)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Busbar trunking system (LV circuitry) / Busbar adapter (low-voltage switching technology) (ec@ss10.0.1-27-37-03-04 [ACN951011])			
Mounting rail armament			1 mounting rail
Type of electric connection			3 conductors AWG 10
Rated current $I_n$		A	32
Min. busbar thickness		mm	2
Max. busbar thickness		mm	2
Width of the adapter		mm	45
Rail width		mm	24
Busbar distance		mm	60

## Dimensions

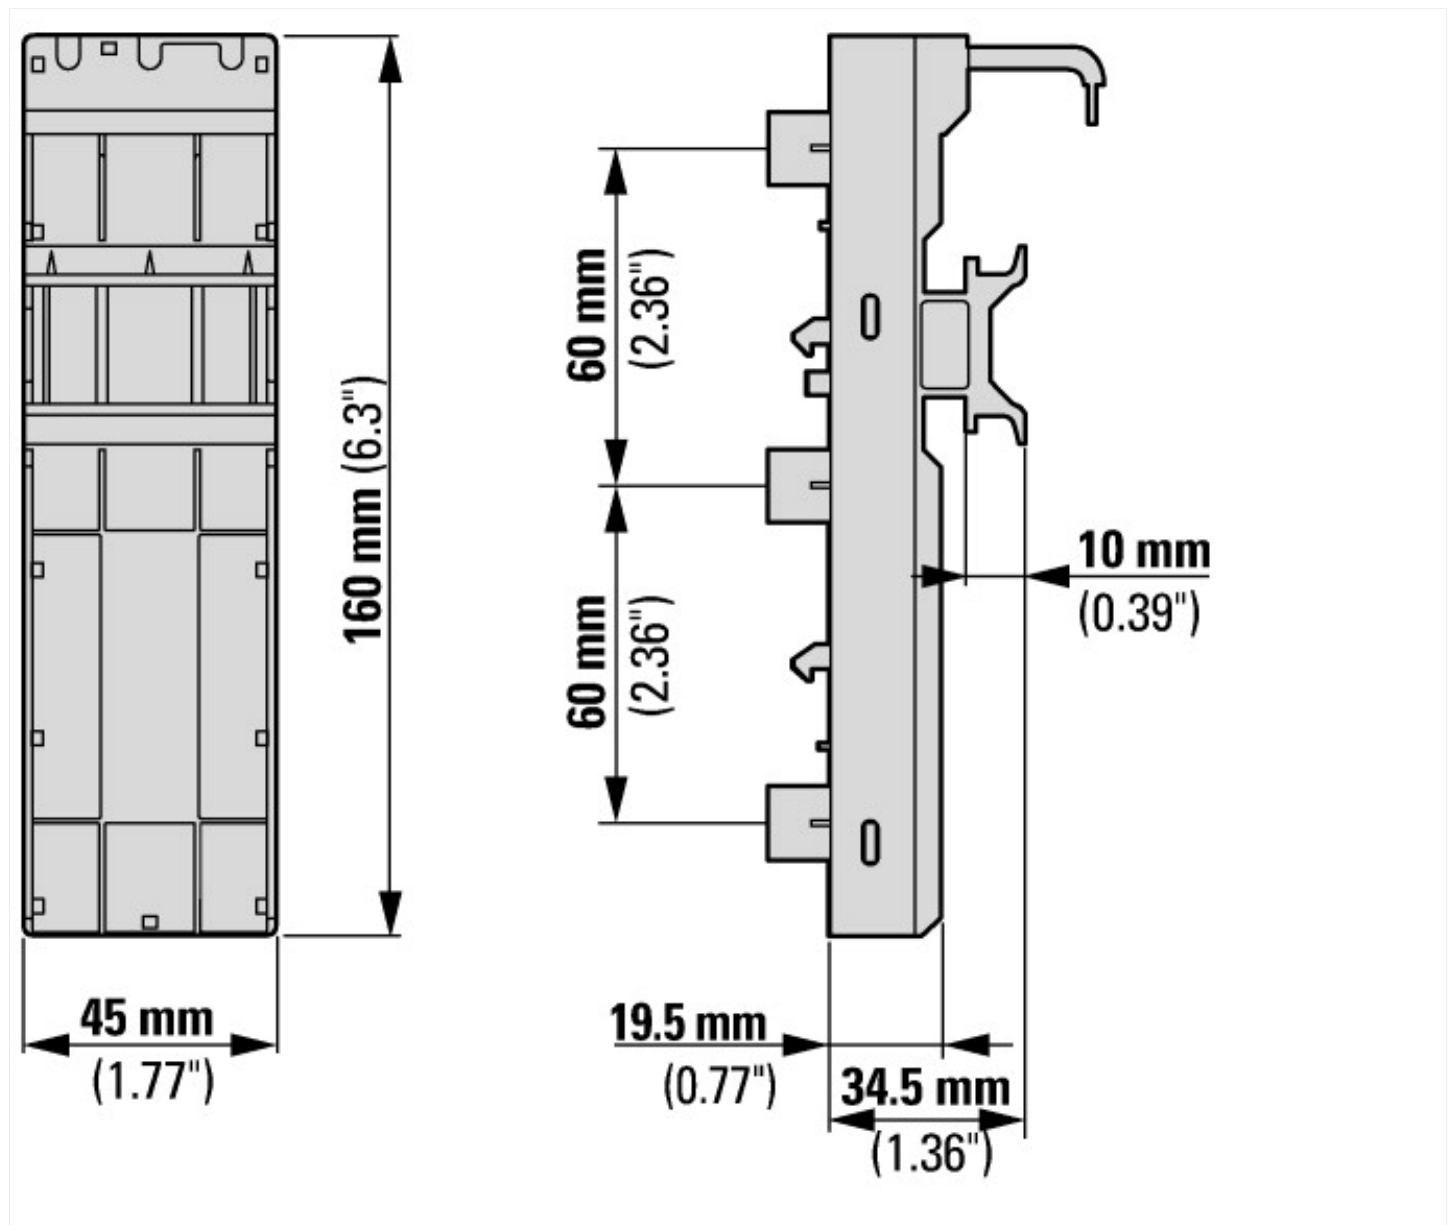

### Additional product information (links)

Motor starters and "Special Purpose Ratings" for the North American market

[http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct\\_3258146.pdf](http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf)

Busbar Component Adapters for modern Industrial control panels

[http://www.moeller.net/binary/ver\\_techpapers/ver960en.pdf](http://www.moeller.net/binary/ver_techpapers/ver960en.pdf)