

Board, 8 outgoing, 405mm width, 125 A

Part no. MSFB-8-125A
Catalog No. 191092
Eaton Catalog No. MSFB-8-125A
EL-Nummer 2400348
(Norway)

Delivery program

Product range			Accessories
Accessories			Board
Self-extinguishing			to UL 94
Width		mm	405
Pole			3
Rated operational current	I_e	A	125
For use with			MSFA...

Technical data

General

Standards			EN 61439-1
Interval between busbar centres		mm	60
Mounting position			horizontal
Degree of Protection			IP20
Weight		kg	1.37

Contacts

Rated operational voltage	U_e	V	690
Rated frequency	f	Hz	50/60
Rated impulse withstand voltage	U_{imp}	kV	6


Electrical data

Rated operational current	I_e	A	125
---------------------------	-------	---	-----

Technical data ETIM 7.0

Energy distribution systems (EG000015) / Busbar system for distribution boards (EC001900)			
Electric engineering, automation, process control engineering / Electrical insulation and connecting material / Energy distribution system / Busbar system for distribution boards (ecl@ss10.0.1-27-40-06-13 [ACO389011])			
Height		mm	160
Width		mm	405
Depth		mm	45
Number of poles			3
Busbar distance		mm	60
Busbar height		mm	0
Busbar thickness		mm	0
Rated current		A	125
Short-circuit breaking capacity (Icw)		kA	10
Material			Copper
Surface protection			Bare

Dimensions

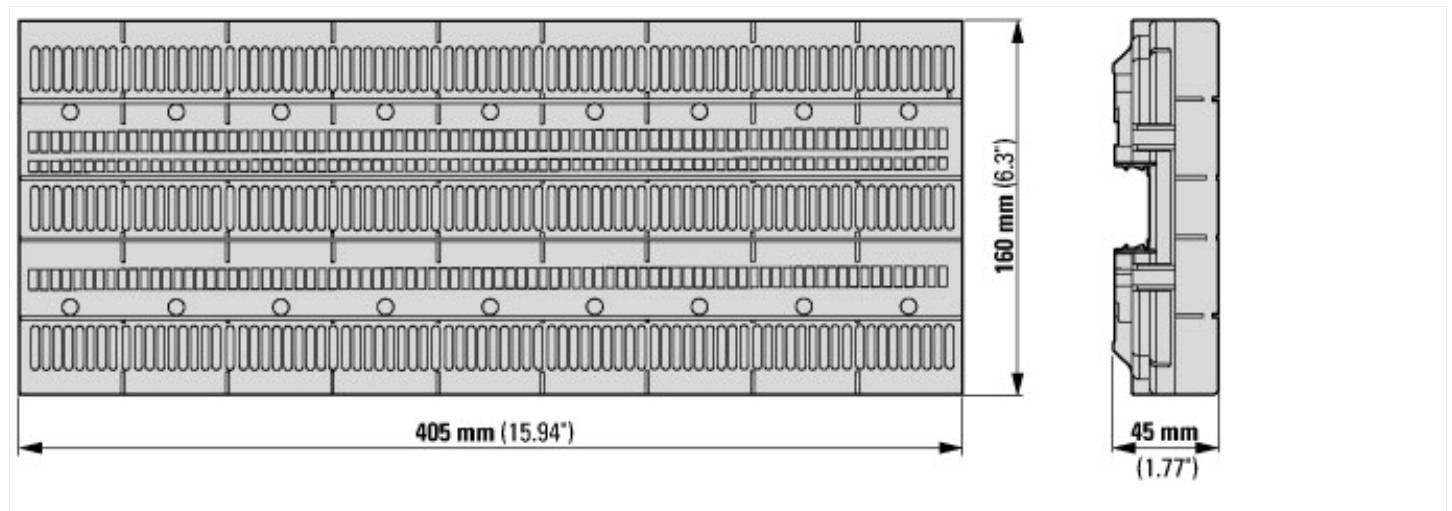

Additional product information (links)

IL015080ZU Board	
IL015080ZU Board	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL015080ZU2018_05.pdf
Motor starters and "Special Purpose Ratings" for the North American market	http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf
Busbar Component Adapters for modern Industrial control panels	http://www.moeller.net/binary/ver_techpapers/ver960en.pdf