



**XAC1000~5000 Series Air Source Treatment Unit(F.R.L Combination)**

Overall Dimensions

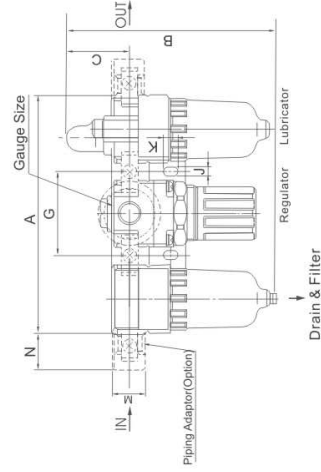

XAC1000-2000

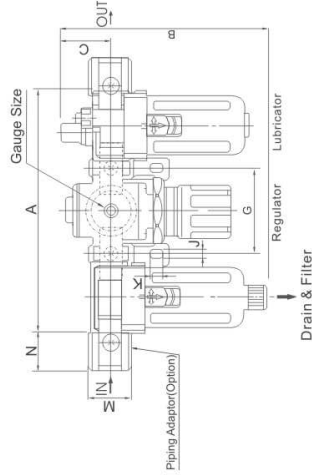

XAC3000-5000

Dimension Sheet

Model	Port Sizer(G)	A	B	C	D	E	F	G	H	J	K	L	M	N	P
XAC1000	M5	91	84.5	25.5	25	26	25	33	20	4.5	7.5	5	17.5	16	38.5
XAC2000	G1/8"-G1/4"	140	125	38	40	56.8	30	50	24	5.5	8.5	5	22	23	50
XAC3000	G1/4"-G3/8"	181	156.5	38	53	60.8	41	64	35	7	11	7	34.2	26	70.5
XAC4000	G3/8"-1/2"	238	191.5	41	70	65.5	50	84	40	9	13	7	42.2	33	88
XAC4000-06	G3/4"	253	193	40.5	70	69.5	50	89	40	9	13	7	46.2	36	88
XAC5000	G3/4"-G1"	300	271.5	48	90	75.5	70	105	50	12	16	10.5	55.5	40	115

**XAC1010~5010 Series Air Source Treatment Unit(F.R.L Combination)**



Graphic Symbol

Ordering Code

XA	C	04	4010	04	04
Series XA series	Function code F.R.L Combination	Port Size M5/M5×0.8 01:G1/8" 02:G1/4" 03:G3/8" 04:G1/2" 06:G3/4" 10:G1"	Body Size 1010 2010 3010 4010 5010	Drain Type Blank/Manual D:Auto Drain Type (Available for 2000 or above)	Metal Cup U: With Iron Cup L: With Aluminum Cup (Available for 2000)

Specification

Model	XAC1010	XAC2010	XAC3010	XAC4010	XAC5010	XAC2000	XAC3000	XAC4000	XAC5000	
Rated Flow(L/min)	90	500	1700	1700	3000	90	500	1700	3000	
Port Size	M5	G1/8"	G1/4"	G1/4"	G3/8"	M5	G1/8"	G1/4"	G3/4"	
Filter Precision	25 μ									
Highest Working Pressure	1.0MPa									
Ensured pressure Resistance	1.5MPa									
Operating Temperature Range	5-60°C									
Range of Adjustable Pressure	0.05-0.7MPa									
Recommended Oil Use	ISO VG 32									
Container Material	Polycarbonate									
Protective Cover	Not Available									
Drain Function	Differential Drain									
Valve Type	With Over flow									
Composing Elements	XAW1000-M5	XAW2000-01	XAW2000-02	XAW3000-03	XAW4000-04	XAW1000-M5	XAW2000-02	XAW3000-03	XAW4000-06	XAW5000-10
	XAL1000-M5	XAL2000-02	XAL3000-02	XAL4000-03	XAL5000-06	XAL1000-M5	XAL2000-02	XAL3000-03	XAL4000-06	XAL5000-10

Note: We have upgraded Oil Drop Accessories on Lubricator of XA series 2000-5000 same to the XO series.