


XS Series Air Source Treatment Unit



XSFC-200

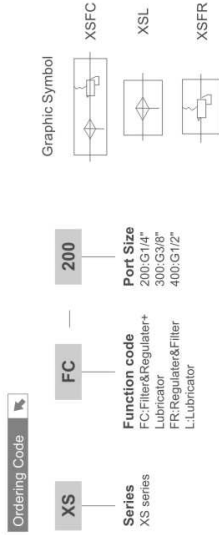


Specification	XSFC	FRIL-200	XSFC/FRIL-300	XSFC/FRIL-400
Model	XSFC	FRIL-200	XSFC/FRIL-300	XSFC/FRIL-400
Port Size	G1/4"	G1/8"	G3/8"	G1/2"
Pressure Gauge Bore	G3/8"	G1/8"	G3/8"	G1/8"
Ensured Pressure Resistance	1.5MPa	1.5MPa	1.5MPa	1.5MPa
Highest Working Pressure	1.0MPa	1.0MPa	1.0MPa	1.0MPa
Environment and Fluid Temperature	5-60°C	5-60°C	5-60°C	5-60°C
Protective Cover	Available	Available	Available	Available

The product have the function of filter,regulator and lubricator,its structure tightly,flow rate largely,output steadily and installation simply.The element has pressure gauge,installation bracket and lubricator. The lubricator can non-stop gas.All have the cup shape protect cover.Use safe and appearance elegant.

XU Series Air Source Treatment Unit



XUC104-C

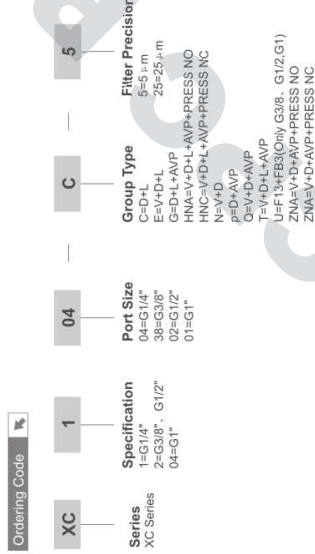

Specification	XUC104-C
Structure Type	Compact Type
Material	Alloy, Brass, Nylon, NBR
Port Size	G1/4", G3/8", G1/2", G1"
Installation Type	Upright place, board connection or wall installation
Working Temperature	5-60°C (1MPa)
Surface Coat	Painted

XG Series Filter,Regulator & Lubricator Combination Code

D	Regulator&Filter	Combination 0-1 Mpa
V	Semi-auto drain,filter	precision 5 μm or 25 μm
L	Two-position three-way separate valve	
	F13	Filter auto drain(only G3/8,G1/2,G1)filter precision 5 μm or 25 μm
	Fb3	Gather Filter auto drain(only G3/8,G1/2",G1")
	AVP	Electricity control soft startvalve
	PRESS	Pressure switch(NC or NO)

XN Series Air Source Treatment Unit



XNFC07-200



XNFR07-200



XNFO7-200



XNLO7-200



XNRO7-200

Specification	XNFC07-200	XNFR07-200	XNFO7-200	XNLO7-200	XNRO7-200
Model	XNFC07-200	XNFR07-200	XNFO7-200	XNLO7-200	XNRO7-200
Operating Fluid	Compressed Air	Compressed Air	Compressed Air	Compressed Air	Compressed Air
Range of Adjustable Pressure	0-0.8Mpa	0-0.8Mpa	0-0.8Mpa	0-0.8Mpa	0-0.8Mpa
Operating Temperature Range	-20-50 °C	-20-50 °C	-20-50 °C	-20-50 °C	-20-50 °C
Joint pipe bore	G1/4"	G1/4"	G1/4"	G1/4"	G1/4"

XU Series Air Source Treatment Unit




XUC-04

XUWL-04

XUW-04

XUW-04

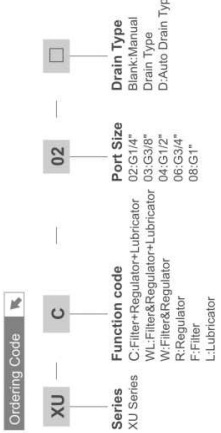

Specification	XUC-04	XUWL-04	XUW-04	XUW-04
Model	XUC-04	XUWL-04	XUW-04	XUW-04
Port Size	G1/4"	G1/4"	G3/8"	G1/2"
Gauge	1/4"	1/4"	1/4"	1/4"
Operating Fluid	Air	Air	Air	Air
Pressure Range	0.05-0.85MPa	0.05-0.85MPa	0.05-0.85MPa	0.05-0.85MPa
Max. Flow rate(Nl/min)	2050	2500	2500	2500
Ambient Temperature	-10-60 °C	-10-60 °C	-10-60 °C	-10-60 °C
Filter Precision	Standard:20 μm	Standard:20 μm	Standard:20 μm	Standard:20 μm
Oil Recommended	Turbine oil(ISO VG32)	Turbine oil(ISO VG32)	Turbine oil(ISO VG32)	Turbine oil(ISO VG32)
Cup Material	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
Structure	Diagon type	Diagon type	Diagon type	Diagon type