Contact element, 1N/O, base fixing, 6. contact, screw connection

Powering Business Worldwide"

Part no. M22-KC10 Article no. 216380 Catalog No. M22-KC10Q

Single univComplete unit Basic function accessories Connection technique Screw terminals Fixing Contacts N/0 = Normally open Actuator travel and actuation force as per DIN EN 60947-5-1, K.5.4.1 Minimum force for positive apening Contact sequence Contact travel diagram, stroke in connection with front element Configuration Degree of Protection Connection to ShartWire-DT Connection to ShartWire-DT Connection to SnartWire-DT Connection to SnartWire-D	Delivery programme		
Single univComplete unit Basic function accessories Connection technique Screw terminals Fixing Contacts N/0 = Normally open Actuator travel and actuation force as per DIN EN 60947-5-1, K.5.4.1 Minimum force for positive apening Contact sequence Contact travel diagram, stroke in connection with front element Configuration Degree of Protection Connection to ShartWire-DT Connection to ShartWire-DT Connection to SnartWire-DT Connection to SnartWire-D	Product range		RMQ-Titan (drilling dimensions 22.5 mm)
Basic function accessories Connector technique Fixing Contact Base fixing Contact Contact NO = Normally open Actuator travel and actuation force as per DIN EN 60947-5-1, K.S.4.1 Minimum force for positive opening Contact sequence Contact travel diagram, stroka in connection with front element Contact travel diagram, stroka in connection with front element Configuration Degree of Protection Connection to SmartWire-DT Connection to SmartWire-DT Connection type Con	Basic function		Accessories
Contacts N/O = Normally open Actuator travel and actuation force as per DIN EN 60947-5-1, K.5.4.1 Minimum force for positive opening Contact sequence Contact travel diagram, stroke in connection with front element Configuration Degree of Protection Connection to SmartWire-DT Connection type Notes Scrow terminals Base fixing Base fixing Base fixing Scrow terminals Base fixing I N/O Contact travel and actuation force as per DIN EN 60947-5-1, K.5.4.1 Actuator travel and actuation force as per DIN EN 60947-5-1, K.5.4.1 Actuator travel diagram, stroke in connection with front element Contact travel diagram, stroke in connection with front element Contact travel diagram, stroke in connection with front element Contact travel diagram, stroke in connection with front element Contact travel diagram, stroke in connection with front element Contact travel diagram, stroke in connection with front element Contact travel diagram, stroke in connection with front element Contact travel diagram, stroke in connection with front element Contact travel diagram, stroke in connection with front element Contact travel diagram, stroke in connection with front element Contact travel diagram, stroke in connection with front element Contact travel diagram, stroke in connection with front element Contact travel diagram, stroke in connection with front element Contact travel diagram, stroke in connection with front element Contact travel diagram, stroke in connection with front element Contact travel diagram, stroke in connection with front element Contact travel diagram, stroke in connection with front element Contact travel diagram, stroke in connection with front element Contact travel diagram, stroke in connection with front element Contact travel diagram, stroke in connection with front element Contact travel diagram, stroke in connection with front element I N/O Contact travel diagram, stroke in connection with front	Single unit/Complete unit		Element
Fixing Contacts NO = Normally open Actuator travel and actuation force as per DIN EN 60947-5-1, K-5.4.1 Minimum force for positive opening Contact sequence Contact travel diagram, stroka in connection with front element Configuration Degree of Protection Connection to SmartWire-DT Connection type Connection type Single contact NO Single contact Single contact NO Single c	Basic function accessories		Contact elements
Contacts N/0 = Normally open Actuator travel and actuation force as per DIN EN 60947-5-1, K.5.4.1 Minimum force for positive opening N Contact sequence Contact travel diagram, stroke in connection with front element Configuration Degree of Protoction Connection to SmartWire-DT Connection type Notes 1 N/0 1 N/0 Actuation O O O O O O O O O O O O O	Connection technique		Screw terminals
N/O = Normally open Actuator travel and actuation force as per DIN EN 60947-5-1, K.5.4.1 Minimum force for positive opening Contact sequence Contact travel diagram, stroke in connection with front element Configuration Degree of Protection Connection to SmartWire-DT Connection type Notes 1 N/O 1 N/	Fixing		Base fixing
Actuator travel and actuation force as per DIN EN 60947-5-1, K.5.4.1 Minimum force for positive opening Contact sequence Contact travel diagram, stroke in connection with front element Configuration Degree of Protection Connection to SmartWire-DT Connection type Notes	Contacts		
Minimum force for positive opening Contact sequence Contact travel diagram, stroke in connection with front element Configuration Configuration Degree of Protection Connection to SmartWire-DT Connection type Notes Configure Connection type Single contact Notes	N/O = Normally open		1 N/0
Contact travel diagram, stroke in connection with front element Contact travel diagram, stroke in connection with front element Configuration Degree of Protection Connection to SmartWire-DT Connection type Single contact Notes	Actuator travel and actuation force as per DIN EN 60947-5-1, K.5.4.1		
Contact travel diagram, stroke in connection with front element Configuration Degree of Protection Connection to SmartWire-DT Connection type Notes	Minimum force for positive opening	N	0
Configuration Degree of Protection Connection to SmartWire-DT Connection type Notes Degree of Protection IP20 Single contact Single contact			1.3
Degree of Protection Connection to SmartWire-DT Connection type Notes 2 3 1	Contact travel diagram, stroke in connection with front element		0 2.8 5.5
Connection to SmartWire-DT no Connection type Single contact Notes	Configuration		2 3 1
Connection type Single contact Notes	Degree of Protection		IP20
Notes	Connection to SmartWire-DT		no
	Connection type		Single contact
Up to 3 off per enclosure base	Notes		
	Up to 3 off per enclosure base		

Technical data

General			
Standards			IEC 60947-5-1
Lifespan, mechanical	Operations	x 10 ⁶	>5
Operating frequency	Operations/h		≦ ₃₆₀₀
Actuating force		n	≦ ₅

Operating torque (screw terminals)		Nm	≦ _{0.8}
Degree of Protection			IP20
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature			
Open		°C	-25 - +70
Terminal capacities		mm^2	
Solid		mm ²	0.75 - 2.5
Stranded		mm ²	0.5 - 2.5
Flexible with ferrule		mm^2	0.5 - 1.5
Contacts			
Rated impulse withstand voltage	U_{imp}	V AC	6000
Rated insulation voltage	Ui	V	500
Overvoltage category/pollution degree			111/3
Control circuit reliability			
at 24 V DC/5 mA	HF	Fault probabilit	< 10 ⁻⁷ (i.e. 1 failure to 10 ⁷ operations)
at 5 V DC/1 mA	H _F	Fault probabilit	$< 5 \times 10^{-6}$ (i.e. 1 failure in 5×10^{6} operations)
Max. short-circuit protective device			
Fuseless		Туре	PKZM0-10/FAZ-B6/1
Fuse	gG/gL	Α	10
Switching capacity			
Rated operational current	l _e	Α	
AC-15			
115 V	le	Α	6
220 V 230 V 240 V	l _e	Α	6
380 V 400 V 415 V	l _e	Α	4
500 V	I _e	Α	2
DC-13			
24 V	l _e	Α	3
42 V	l _e	Α	1.7
60 V	I _e	Α	1.2
110 V	I _e	Α	0.6
220 V	I _e	Α	0.3
Lifespan, electrical			
AC-15			
	Operations	x 10 ⁶	1.6
AC-15	Operations Operations	X 10	1.6 1
AC-15 230 V/0.5 A	Operations	x 10 ⁶	
AC-15 230 V/0.5 A 230 V/1.0 A	Operations	x 10 ⁶	1

Design verification as per IEC/EN 61439

Technical data for design verification			
ecinical data for design vernication			
Rated operational current for specified heat dissipation	In	Α	6
Heat dissipation per pole, current-dependent	P_{vid}	W	0.11
Equipment heat dissipation, current-dependent	P_{vid}	W	0
Static heat dissipation, non-current-dependent	$P_{\nu s}$	W	0
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	70
EC/EN 61439 design verification			
10.2 Strength of materials and parts			

10.2.2 Corrosion resistance	Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures	Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat	Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects	Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation	Meets the product standard's requirements.
10.2.5 Lifting	Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact	Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions	Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances	Meets the product standard's requirements.
10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9 Insulation properties	
10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 6.0

Low-voltage industrial components (EG000017) / Auxiliary contact block (EC000041)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Auxiliary switch block (ecl@ss8.1-27-37-13-02 [AKN342010])

Number of contacts as change-over contact		0
Number of contacts as normally open contact		1
Number of contacts as normally closed contact		0
Rated operation current le at AC-15, 230 V	А	6
Type of electric connection		Screw connection
Model		Top mounting
Mounting method		Floor fastening

Approvals

Product Standards	IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94-91; CE marking
UL File No.	E29184
UL Category Control No.	NKCR
CSA File No.	012528
CSA Class No.	3211-03
North America Certification	UL listed, CSA certified
Degree of Protection	UL/CSA Type: -

Dimensions

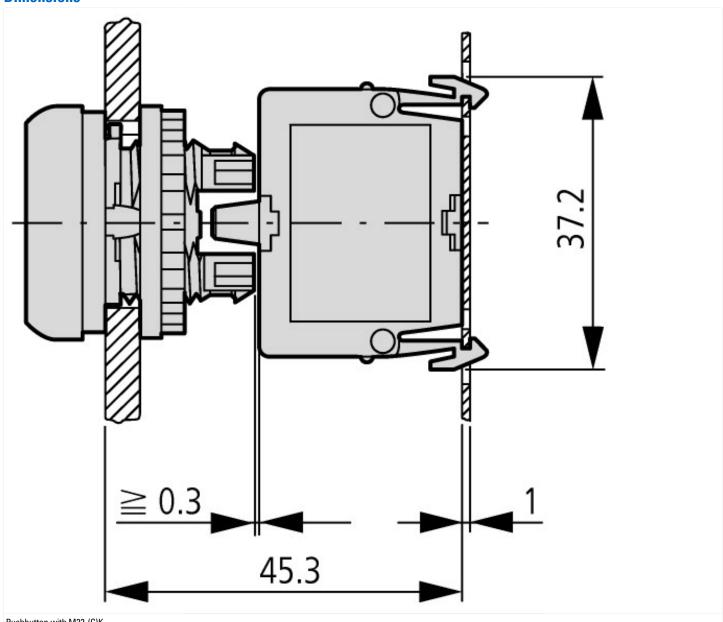

Pushbutton with M22-(C)K... Pushbutton with M22-(C) LED... + M22-XLED...

Additional product information (links)

IL04716002Z (AWA1160-1745) RMQ-Titan System

IL04716002Z (AWA1160-1745) RMQ-Titan System ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL04716002Z2015_02.pdf