

### LED element, green, front mount, 85-264VAC

Part no. M22-LED230-G Article no. 216565 Catalog No. M22-LED230-GQ



### **Delivery programme**

		RMQ-Titan (drilling dimensions 22.5 mm)
		LED elements
		Single unit
		Front fixing
		Screw terminals
U <sub>e</sub>	V	85 - 264 V AC, 50/60 Hz
l <sub>e</sub>	mA	5 - 15
P <sub>max</sub> .	W	0.33
		At 230 V
		Green
		IP20
		- N/A -
		no
	l <sub>e</sub>	I <sub>e</sub> mA

### Notes

For pushbutton actuators, indicator lights, illuminated pushbutton actuators and illuminated selector switch actuators, the following applies:

M22...-R only in combination with M22-LED...-R

M22...-G only in combination with M22-LED...-G

M22...-W only in combination with M22-LED...-W

M22...-Y only in combination with M22-LED...-W

M22...-B in combination with M22-LED...-W or M22-LED...-B

### **Technical data**

#### General

	IEC/EN 60947 VDE 0660
Nm	≦ <sub>0.8</sub>
	Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
°C	-25 - +70 - > 200 V AC/60 Hz: -25/+55 °C
°C	- 40 - + 80
	As required
g	30 Shock duration 11 ms Sinusoidal according to IEC 60068-2-27
$mm^2$	
$mm^2$	0.75 - 2.5
	°C °C g

Stranded		$\text{mm}^2$	0.5 - 2.5
Contacts			
Rated impulse withstand voltage	$U_{\text{imp}}$	V AC	6000
Rated insulation voltage	Ui	V	500
Overvoltage category/pollution degree			III/3
Indoor and protected outdoor installation			

# Design verification as per IEC/EN 61439

Doorgii voriiroadion ao por 120/214 or 100			
Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	0
Heat dissipation per pole, current-dependent	P <sub>vid</sub>	W	0
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	0
Static heat dissipation, non-current-dependent	P <sub>vs</sub>	W	1
Heat dissipation capacity	P <sub>diss</sub>	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	70
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. $\label{eq:continuous}$

## **Technical data ETIM 6.0**

Low-voltage industrial components (EG000017) / Lamp holder block for control circuit devices (EC000204)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Command and alarm device / Bulb socket block for command and alarm devices (ecl@ss8.1-27-37-12-09 [AKF027011])


(6616666.1 27 67 12 66 [rittle 627611])		
With integrated transformer		No
With integrated voltage decreasing resistor		No
With integrated lamp		Yes
With integrated diode		Yes
Lamp holder		None
Rated voltage Ue at AC 50 Hz	V	230 - 230
Rated voltage Ue at AC 60 Hz	V	230 - 230

Rated voltage Ue at DC	V	0 - 0
Voltage type for actuating		AC
Type of lamp		LED
Connection type auxiliary circuit		Screw connection
Colour lamp		Green
Type of fastening		Front fastening

# **Approvals**

Product Standards	IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94-91; CE marking
UL File No.	E29184
UL Category Control No.	NKCR
CSA File No.	012528
CSA Class No.	3211-03
North America Certification	UL listed, CSA certified
Degree of Protection	UL/CSA Type: -

## **Dimensions**

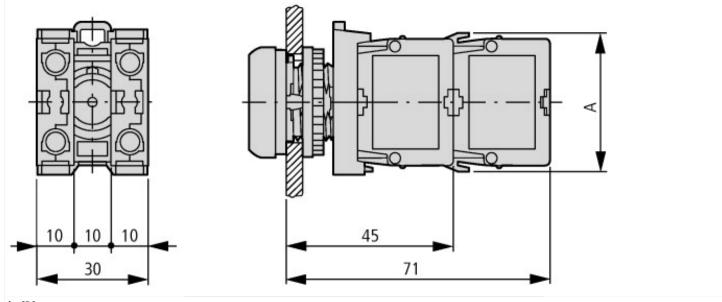

A = 37.2

Pushbutton with M22-(C)K... Pushbutton with M22-(C) LED... + M22-XLED...

## **Additional product information (links)**

IL04716002Z (AWA1160-1745) RMQ-Titan System

IL04716002Z (AWA1160-1745) RMQ-Titan System

 $ftp://ftp.moeller.net/DOCUMENTATION/AWA\_INSTRUCTIONS/IL04716002Z2015\_02.pdf$