## Miniature Panel Jacks


## **CE OMEGA**®

## **MPJ Series** Easy-to-use spring clip shown Shown actual size. Compact Size Easy Mount with Spring Clip Accessible Terminal Screws Spring clip Color-Coded included with Accepts OMEGA's as well connector as all Industry Standard **Miniature Male Connectors** Glass-Filled Nylon Rated from -29 to 180°C (-20 to 356°F) Mates with

**Note:** Minor discoloration of connector may occur between 150°C (302°F) and 180°C (356°F). Electrical properties are not affected.

The MPJ Miniature Panel Jack requires less than half of the panel area required by the standard size version. A simple push-on clip is all that is required to retain the connector in a rectangular cutout, or the optional MSS snap strip can be used to mount a row. Angled terminal screws allow wiring to be done after panel assembly.

- 8.1 x 16.7 mm (0.32 x 0.66") Cutout Required
- 14.3 mm (0.56") Centers Horizontally
- 23.8 mm (0.94") Centers Row to Row Minimum

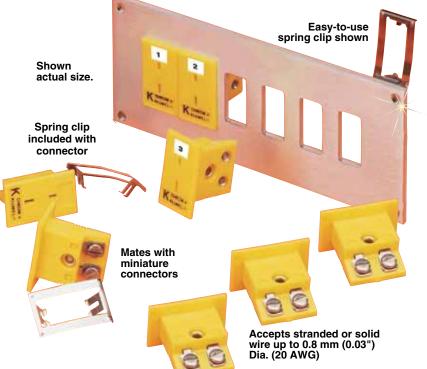

Panel punches available online.



Optional supply of dust caps, MPJ-CAP-12 available.

_	
Το	Order
10	UIUGI

We make running changes	
when technical advances allow.	
Check at time of ordering	
for additional features.	

Extra Mounting Clips Available
Model MH-MPJ-1. (each)
Model MH-MPJ-5. (5-pack)
Optional ID Number Labels:
Model 1-6S, for 1 thru 6

Model 1-12S, for 1 thru 12	
Model 1-18S, for 1 thru 18	
Model 1-24S, for 1 thru 24	
Model <b>1-50S</b> , for 1 thru 50	
Model <b>1-100S</b> , for 1 thru 100	
	-

## **Discount Schedule**

1-10	Net
11-49	5%
50-99	10%
100-999	15%
1000-4999	20%
5000 and over	25%

rder				
Type of Thermocouple Used	Compensating Alloy Used in Connector		Shell	Model Number
With Connector	+	-	Color	(Female)
CHROMEGA®-ALOMEGA®	CHROMEGA®	ALOMEGA®	Yellow	MPJ-K-F
Copper-Constantan	Copper	Constantan	Blue	MPJ-T-F
Iron-Constantan	Iron	Constantan	Black	MPJ-J-F
CHROMEGA®-Constantan	CHROMEGA®	Constantan	Purple	MPJ-E-F
Pt-Pt/13%Rh	Copper	RNX/SHX	Green	MPJ-R/S-F
W-W/26%Re	GPX	GNX	Red	MPJ-G-F
W/5%Re-W/26%Re	CPX	CNX	Red	MPJ-C-F
W/3%Re-W/25%Re	DPX	DNX	Red	MPJ-D-F
Uncompensated	Copper	Copper	White	MPJ-U-F
<b>OMEGALLOY®</b>	OMEGA-P®	OMEGA-N®	Orange	MPJ-N-F
	Type of   Thermocouple Used   With Connector   CHROMEGA®-ALOMEGA®   Copper-Constantan   Iron-Constantan   CHROMEGA®-Constantan   CHROMEGA®-Constantan   Pt-Pt/13%Rh   W-W/26%Re   W/5%Re-W/26%Re   W/3%Re-W/25%Re   Uncompensated	Type of Thermocouple Used With ConnectorCompensa Used in CCHROMEGA®-ALOMEGA®CHROMEGA®Copper-ConstantanCopperIron-ConstantanIronCHROMEGA®-ConstantanCHROMEGA®CHROMEGA®-ConstantanCHROMEGA®Pt-Pt/13%RhCopperW-W/26%ReGPXW/5%Re-W/26%ReCPXW/3%Re-W/25%ReDPXUncompensatedCopper	Type of Thermocouple Used With ConnectorCompensating Alloy Used in ConnectorCHROMEGA®-ALOMEGA®+-CHROMEGA®-ALOMEGA®CHROMEGA®ALOMEGA®Copper-ConstantanCopperConstantanIron-ConstantanIronConstantanCHROMEGA®-ConstantanCHROMEGA®ConstantanCHROMEGA®-ConstantanChROMEGA®ConstantanPt-Pt/13%RhCopperRNX/SHXW-W/26%ReGPXGNXW/5%Re-W/26%ReCPXCNXW/3%Re-W/25%ReDPXDNXUncompensatedCopperCopper	Type of Thermocouple Used With ConnectorCompensating Alloy Used in ConnectorShell ColorCHROMEGA®-ALOMEGA®CHROMEGA®ALOMEGA®YellowCopper-ConstantanCopperConstantanBlueIron-ConstantanIronConstantanBlackCHROMEGA®-ConstantanChROMEGA®CenstantanBlackCHROMEGA®-ConstantanCopperConstantanBlackCHROMEGA®-ConstantanChROMEGA®ConstantanPurplePt-Pt/13%RhCopperRNX/SHXGreenW-W/26%ReGPXGNXRedW/5%Re-W/26%ReCPXCNXRedW/3%Re-W/25%ReDPXDNXRedUncompensatedCopperCopperWhite

Connectors come with mounting hardware (spring clip).

Note: Type U (Uncompensated) connectors are used with Type B thermocouples (Platinum/6% The discrete section of the discrete section and the discrete with Type B information of the discrete section and the discrete sectio