

Digital output module for XC100/200, 24 V DC, 8DO(T)

XIOC-8D0 Part no. Article no. 257894



Delivery programme

| Function | Digital modules |
|-------------|--|
| | Compact I/O system for connection to XC100/200 Modular PLCs XC100/200 expandable with up to 15 XI/OC modules Optionally, screw terminals or spring-loaded terminals for digital/analog modules |
| Description | 8 outputs, 24 V DC, 0.3 A |

Technical data

| | • | | | | ı |
|----------|---|----|----|----|---|
| uciici u | u | eı | ле | ra | l |

| Conordi | | | |
|---------------------------------------|---|----|---|
| Standards | | | IEC/EN 61131-2 EN 50178 |
| Ambient temperature | | °C | 0 - +55 |
| Storage | 8 | °C | -25 - +70 |
| Vibration resistance | | | 10 - 57 Hz ±0.075 mm 57 - 150 Hz ±1.0 mm |
| Mechanical shock resistance | | g | 15 Shock duration 11 ms |
| Impact resistance | | | 500 g/ [©] 50 mm ±25 g |
| Overvoltage category/pollution degree | | | 11/2 |
| Protection class | | | 1 |
| Degree of Protection | | | IP20 |
| Emitted interference | | | DIN/EN 55011/22, Class A |
| Weight | | kg | 0.16 |
| Power supply | | | |

| · ottor cuppry | | | |
|--------------------|----------------|------|---------------------------|
| Rated voltage | U _e | V DC | 24 (12) |
| Admissible range | | | 20.4 – 28.8 (11.8 – 14.4) |
| Neutral poles | | | |
| Duration of dip | | ms | 10 |
| Repetition rate | | s | 1 |
| Residual ripple | | % | ≦ ₅ |
| Maximum power loss | P_{v} | W | 0.4 |

Outputs

| Outhurs | | |
|--|------|--------------------------|
| Output type | | Transistor (source type) |
| Output voltage | V DC | 24 (-15+20 %) |
| Minumum switching current | mA | 1 |
| Leakage current | mA | 0.1 |
| Output delay | | |
| Off → On | ms | |
| Debounce OFF | ms | 0.3 |
| Output channels | Qty. | 8 |
| Channels with the same reference potential | Qty. | 8 |
| Overvoltage protection | | Diode |
| Fuse | Α | None |
| Short-circuit protection | | Yes |
| Potential isolation | | Opto-isolated |
| Indication elements | | LED (green) |

| Terminations | | | Plug-in terminal block |
|---|-------|----|------------------------|
| | | | |
| Internal current consumption (5 V DC) | | mA | 30 |
| | | | |
| External voltage for outputs/module (30 mA for module supply) | U_s | V | 24 DC (-15/+20%) |
| Short-circuit protection | | | Yes |

Notes

The following applies to the external power supply for operating the relay: in UL applications the supply cables must be AWG 16 (1.3 mm^2).


Design verification as per IEC/EN 61439

| 2 0 0 1 1 0 1 1 1 0 1 1 0 1 1 0 1 1 0 1 1 0 1 1 0 1 1 0 1 1 0 1 1 0 1 1 0 1 1 0 1 1 0 1 1 0 1 1 0 1 1 0 1 1 0 1 | | | |
|--|-------------------|----|--|
| Technical data for design verification | | | |
| Rated operational current for specified heat dissipation | In | Α | 0 |
| Heat dissipation per pole, current-dependent | P _{vid} | W | 0 |
| Equipment heat dissipation, current-dependent | P _{vid} | W | 0 |
| Static heat dissipation, non-current-dependent | P_{vs} | W | 0.4 |
| Heat dissipation capacity | P _{diss} | W | 0 |
| Operating ambient temperature min. | | °C | 0 |
| Operating ambient temperature max. | | °C | 55 |
| IEC/EN 61439 design verification | | | |
| 10.2 Strength of materials and parts | | | |
| 10.2.2 Corrosion resistance | | | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures | | | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat | | | Meets the product standard's requirements. |
| $10.2.3.3\ Verification\ of\ resistance\ of\ insulating\ materials\ to\ abnormal\ heat\ and\ fire\ due\ to\ internal\ electric\ effects$ | | | Meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation | | | Meets the product standard's requirements. |
| 10.2.5 Lifting | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions | | | Meets the product standard's requirements. |
| 10.3 Degree of protection of ASSEMBLIES | | | Meets the product standard's requirements. |
| 10.4 Clearances and creepage distances | | | Meets the product standard's requirements. |
| 10.5 Protection against electric shock | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 Internal electrical circuits and connections | | | Is the panel builder's responsibility. |
| 10.8 Connections for external conductors | | | Is the panel builder's responsibility. |
| 10.9 Insulation properties | | | |
| 10.9.2 Power-frequency electric strength | | | Is the panel builder's responsibility. |
| 10.9.3 Impulse withstand voltage | | | Is the panel builder's responsibility. |
| 10.9.4 Testing of enclosures made of insulating material | | | Is the panel builder's responsibility. |
| 10.10 Temperature rise | | | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating | | | Is the panel builder's responsibility. |
| 10.12 Electromagnetic compatibility | | | Is the panel builder's responsibility. |
| 10.13 Mechanical function | | | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |

Approvals

| Product Standards | IEC: see Technical Data; UL508; CSA-C22.2 No. 0-M; CSA-C22.2 No. 142-M; CE marking |
|--------------------------------------|--|
| UL File No. | E135462 |
| UL Category Control No. | NRAQ |
| CSA File No. | 012528 |
| CSA Class No. | 2252-01 |
| North America Certification | UL listed, CSA certified |
| Specially designed for North America | No |
| Current Limiting Circuit-Breaker | No |

Dimensions

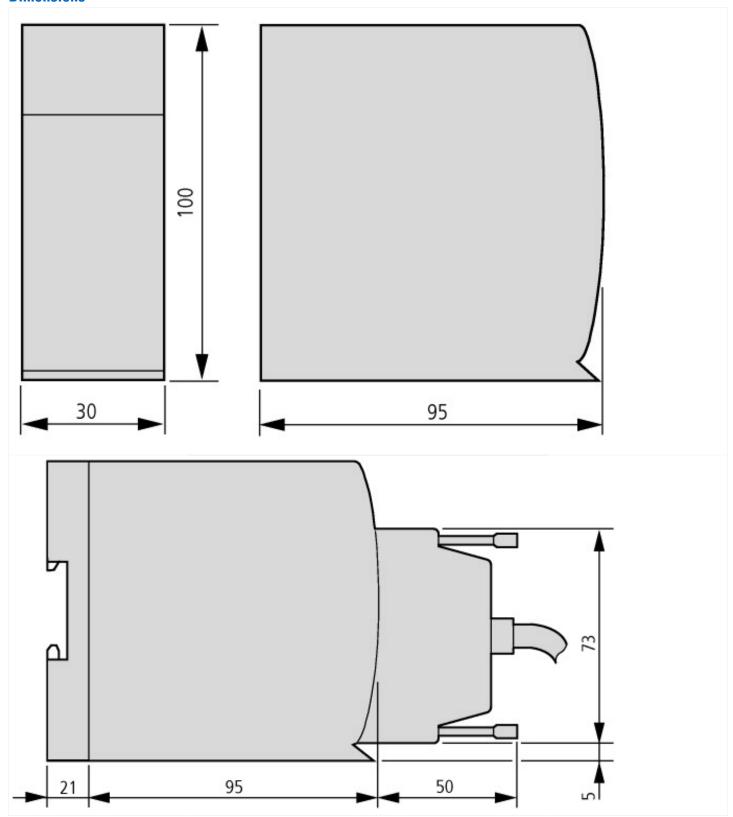

Additional product information (links)

| MN05002002Z (AWB2725-1452) XIOC signal mo | odules |
|--|--|
| MN05002002Z (AWB2725-1452) XIOC- Signalmodule - Deutsch | ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05002002Z_DE.pdf |
| MN05002002Z (AWB2725-1452) XIOC signal modules - English | ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05002002Z_EN.pdf |