SIEMENS

Product data sheet

3NA3807



LV HRC FUSE LINK GL/GG WITH NON-INSULATED GRIP LUGS WITH FRONT INDICATOR SIZE 000, 20A, AC 500V/DC 250V

Similar to image

Technical data:						
product brand name		SENTRON				
Product designation		LV HRC fuse link				
Current / for AC / rated value	А	20				
Operating class of the fuse link		gG				
Size of the fallback-system / acc. to DIN EN 60269-1		NH000				
Supply voltage						
• for AC / rated value	V	500				
• for DC	V	250				
Switching capacity current						
• in accordance with IEC 60947-2 / rated value	kA	120				
• with DC / in accordance with IEC 60947-2 / rated value	kA	25				
Design of the fuse link		LV HRC fuse link				
Design of an identification indicator		Front indicators				
Mounting type		Non-insulated grip lugs				
mounting position		Any, preferably vertical				
Protection class IP		IP20, with connected conductors				
Climatic class		-20 to +50 at 95% relative humidity				
Ambient temperature	°C	-5 +40				

	-		
Ambient temperature / during storage / note		Air humidity 90% at 20 °C	
Design of the switching contact		Non-corroding, silver-plated	
Net weight	g	120	
Item designation			
according to DIN EN 61346-2		F	
according to DIN EN 81346-2		F	

Certificates/approvals:


Certificates/approvals:								
General Product Approval		Declaration of Conformity	Test Certificates					
GOST	KEMA KEMA		EG-Konf.	Special Test Certificate	<u>Type Test</u> Certificates/Test <u>Report</u>			
Shipping Approval	other							
GL	Environmental Confirmations							
GL								
Further information:								
Information- and Downloadcenter (Catalogs, Brochures,) http://www.siemens.com/lowvoltage/catalogs								
Industry Mall (Online ordering system) https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3NA3807								
Service&Support (Manuals, Certificates, Characteristics, FAQs,) http://support.automation.siemens.com/WW/view/en/3NA3807/all								
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams,)								


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA3807

CAx-Online-Generator

http://www.siemens.com/cax

Tender specifications
Datanorm GAEB81 GAEB83 RTF TXT

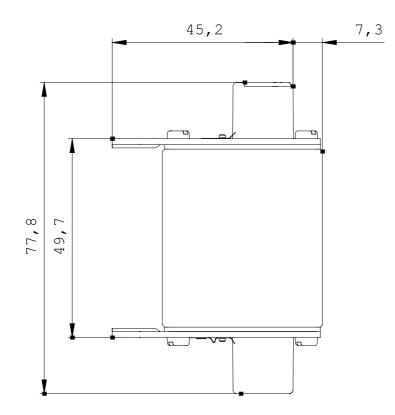



last change:

Jul 7, 2014